
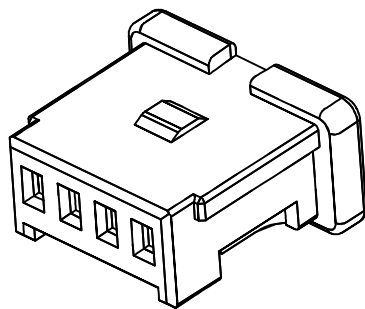


RoHS

受控

Circuit 1

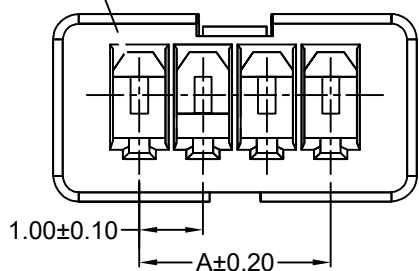

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 300VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40℃ to +105℃



Material:

- Insulator (Housing): PA66 (UL94-V0)
- Color: White

Ordering Information

SCT1012H - xx B WT 182

No.of Pins See Table
Insulation B=PA66 V0
Color WT=White

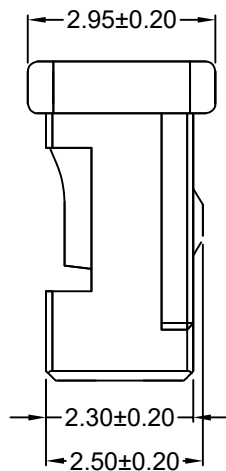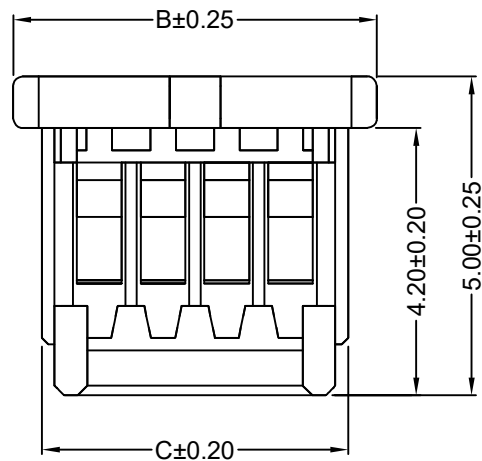

Dimensions			Part NO	PIN
A	B	C		
1.00	3.70	2.70	SCT1012H-02BWT182	02
2.00	4.70	3.70	SCT1012H-03BWT182	03
3.00	5.70	4.70	SCT1012H-04BWT182	04
4.00	6.70	5.70	SCT1012H-05BWT182	05

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2503

OPERATION	Yao	2021.05.22
DESIGN	Xiong	2021.05.22
CHECK	Lisa	2021.05.22
APPROVE		



SCONDAR ELECTRONIC LIMITED

A0	2021.05.22	NEW			Angle ±3°	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	

SHEET	1/1	Part No.	SCT1012H-xxBWT182(2-5P)
PROJ.		TITLE:	MX501330 1.0mm PA66 V0 White xxPin No-Lock HouSing