
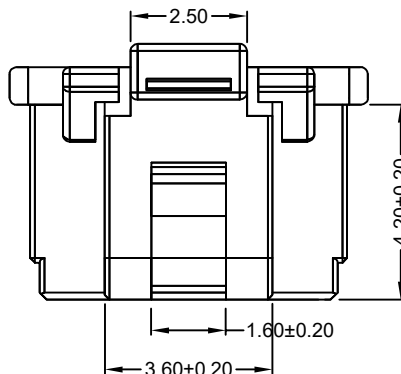


RoHS

受控


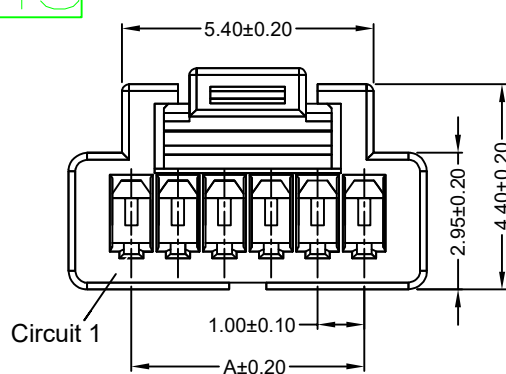


Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 300VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40℃ to +105℃

Material:

- Insulator (Housing): PA66 (UL94-V0)
- Color: White

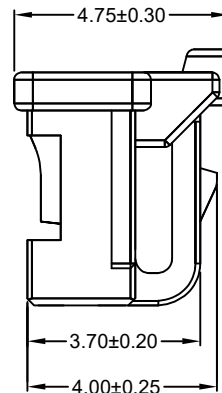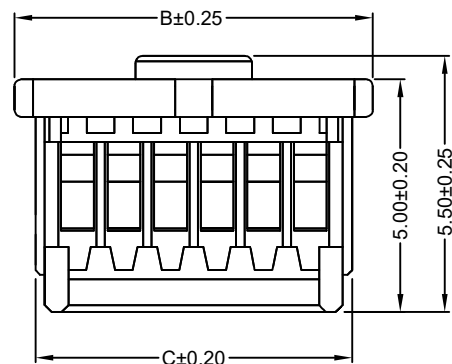

Ordering Information



SCT1012H - xx B WT 182

No.of Pins
See Table

Insulation
B=PA66 V0

Color
WT=White

Dimensions			Part NO	PIN
A	B	C		
5.00	7.70	6.80	SCT1012H-06BWT182	06
6.00	8.70	7.80	SCT1012H-07BWT182	07
7.00	9.70	8.80	SCT1012H-08BWT182	08
8.00	10.70	9.80	SCT1012H-09BWT182	09
9.00	11.70	10.80	SCT1012H-10BWT182	10
10.00	12.70	11.80	SCT1012H-11BWT182	11
11.00	13.70	12.80	SCT1012H-12BWT182	12
12.00	14.70	13.80	SCT1012H-13BWT182	13
13.00	15.70	14.80	SCT1012H-14BWT182	14
14.00	16.70	15.80	SCT1012H-15BWT182	15

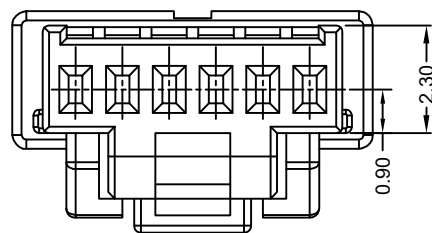

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2503

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Xiong
Lisa

2021.05.22
2021.05.22
2021.05.22

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
Part No.

SCONDAR

SCONDAR ELECTRONIC LIMITED

SCT1012H-xxBWT182(6-15P)

MX501330 1.0mm PA66 V0 White xxPin
With Lock HouSing

A0 2021.05.22
REV DATE
MODIFICATION DESCRIPTION

NEW
CHANGE APPROVE

CHANGE APPROVE