

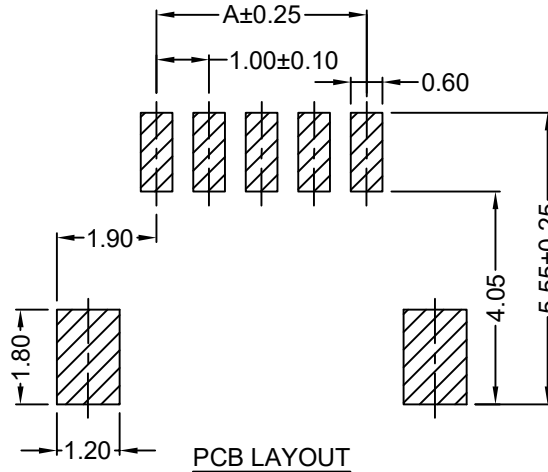
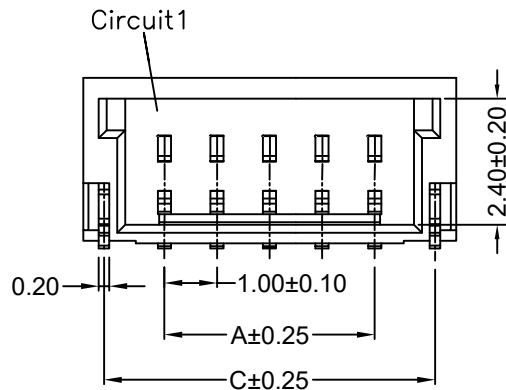



RoHS

受控

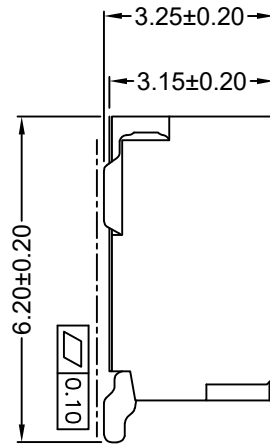

PCB LAYOUT

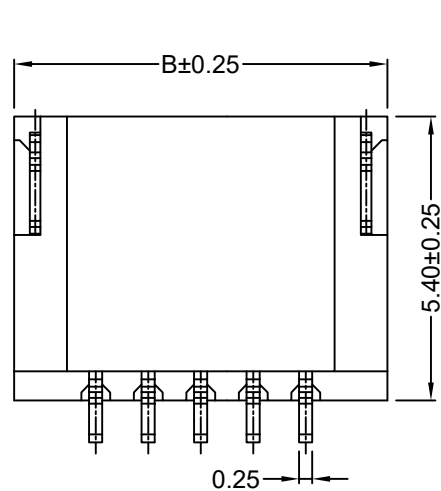

Specification:
-Current Rating: 1A AC/DC
-Voltage Rating: 100V AC/DC
-Insulation Resistance: 100MΩ Min
-Withstanding Voltage: 300VAC(1Min)
-Contact resistance: 20mΩ(Max).
-Operation Temperature: -40℃ to +105℃

Material:
-Insulator (Housing): PA9T (UL94V-)0
-PIN:Phosphor Bronze Tin-Plated
-Welding lug Brass Tin -plated
-Color: Begie

Ordering Information

SCT1012WRS - xx E 1 BE 182

No.of Pins
See Table

Insulation
E=PA9T

Package
1=Tape&Reel

Color
BE=Begie

Poles	Dimensions(mm)		
	A	B	C
2	1.00	4.10	3.30
3	2.00	5.10	4.30
4	3.00	6.10	5.30
5	4.00	7.10	6.30

SCONDAR ELECTRONIC,LTD
ENGINEER XJ2503

OPERATION	DRAW	Yao	2021.07.02
X.X ±0.35	DESIGN	Xiong	2021.07.02
X.XX ±0.25	CHECK	Lisa	2021.07.02
X.XXX ±0.15	APPROVE		
Angle ± 3'			
DIM TOL			

SCALE	—	SCONDAR	SCONDAR ELECTRONIC LIMITED	
UNIT	mm			
SIZE	A4			
SHEET	1/1	PART NO.	SCT1012WRS-xxE1BE182(2-5P)	
PROJ.	⌀	TITLE:	MX501568 1.00mm PA9T V0 xxPin Beige SMT WR Socket tape and reel package MPQ=1500Pcs/Reel	