
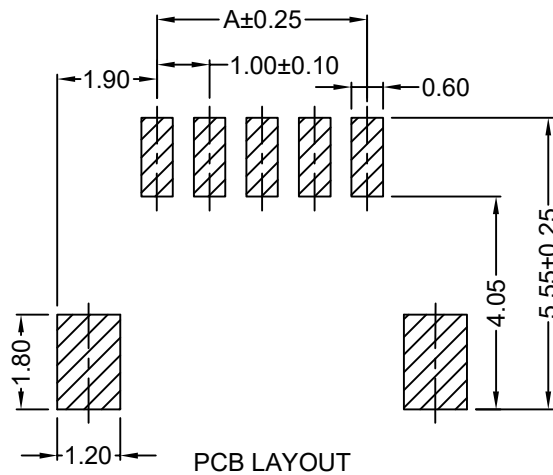


受控

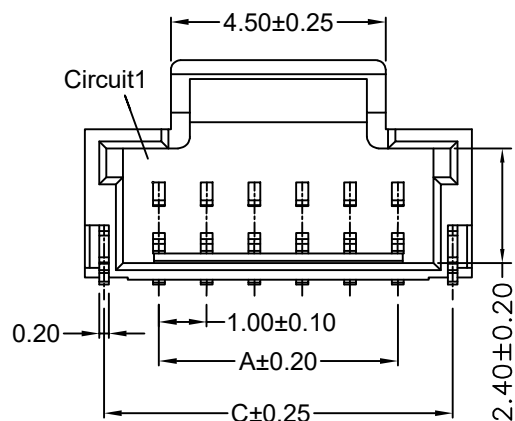

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 300VAC1(Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40℃ to +105℃

Material:

- Insulator (Housing): PA9T (UL94V-0)
- PIN:Phosphor Bronze Tin-Plated
- Welding lug Brass Tin -plated
- Color: Begie

Ordering Information




SCT1012WRS - xx E 1 BE 182

No.of Pins
See Table

Insulation
E=PA9T

Package
1=Tape&Reel

Color
BE=Begje

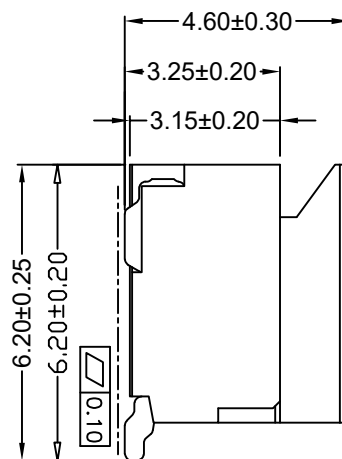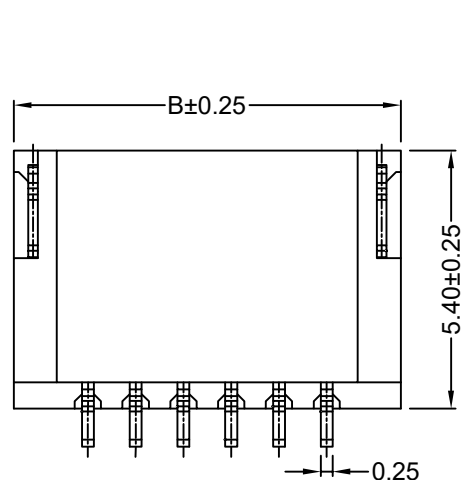

Poles	Dimensions(mm)		
	A	B	C
6	5.00	8.10	7.30
7	6.00	9.10	8.30
8	7.00	10.10	9.30
9	8.00	11.10	10.30
10	9.00	12.10	11.30
11	10.00	13.10	12.30
12	11.00	14.10	13.30
13	12.00	15.10	14.30
14	13.00	16.10	15.30
15	14.00	17.10	16.30

					OPERATION		DRAW	Yao	2021.07.02	SCALE	—	 SCONDAR ELECTRONIC LIMITED		
		SCONDAR ELECTRONIC, LTD ENGINEER XJ2503			X.X	±0.35	DESIGN	Xiong	2021.07.02	UNIT	mm			
			X.XX	±0.25	CHECK	Lisa		2021.07.02	SIZE	A4				
AO	2021.07.02		NEW	——		——	X.XXX	±0.15	APPROVE					SHEET
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'	DIM		TOL	PROJ.		TITLE:	MX501568 1.00mm PA9T V0 xxPin Beige SMT WR Socket tape and reel package MPQ=1500Pcs/Reel