


受控





- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 300VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40℃ to +105℃

- Insulator (Housing): PA9T (UL94V-0)
- PIN:Phosphor Bronze Tin-Plated
- Welding lug Brass Tin -plated
- Color: Begie

SCT1012WVS - xx E 1 BE 182

Color
BE=Beige

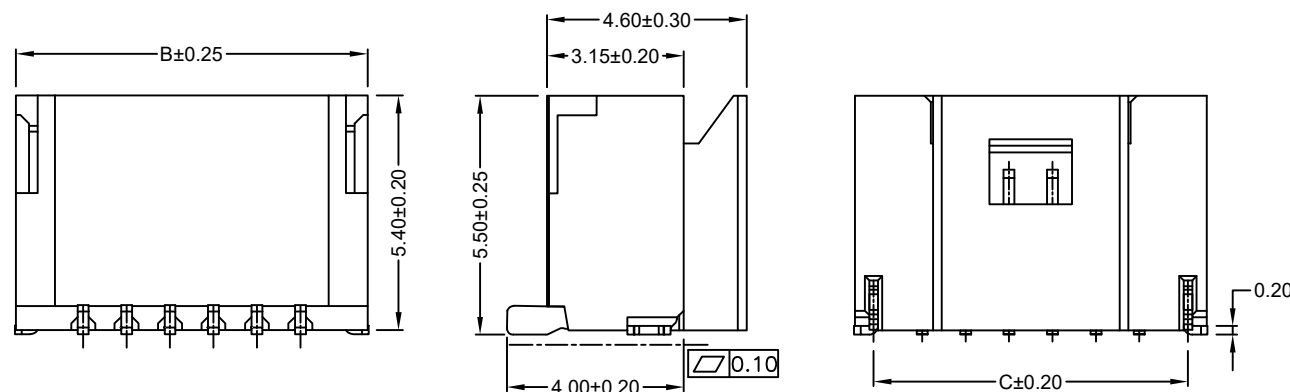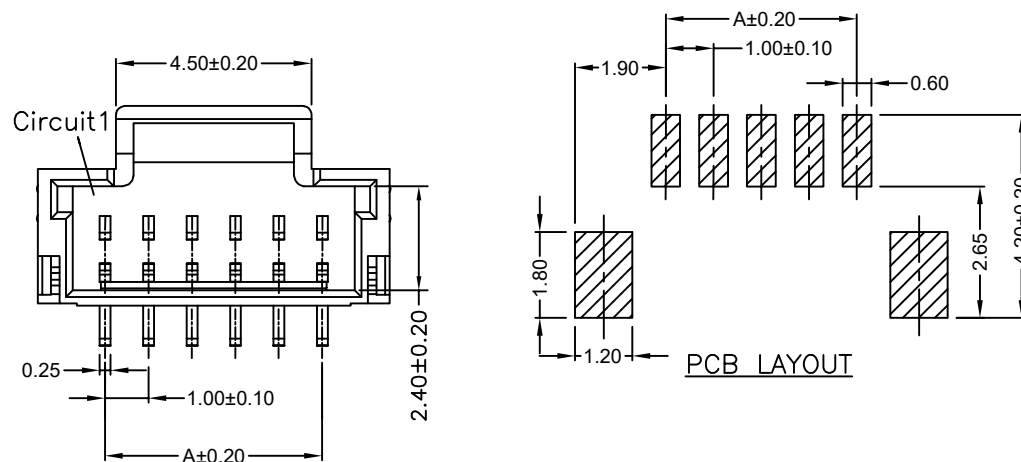

Poles	Dimensions(mm)		
	A	B	C
6	5.00	8.10	7.30
7	6.00	9.10	8.30
8	7.00	10.10	9.30
9	8.00	11.10	10.30
10	9.00	12.10	11.30
11	10.00	13.10	12.30
12	11.00	14.10	13.30
13	12.00	15.10	14.30
14	13.00	16.10	15.30
15	14.00	17.10	16.30

SCONDAE ELECTRONIC, LTD
ENGINEER X12503

OPERATION		DRAW	Yao	2021.07.02
X.X	±0.35	DESIGN	Xiong	2021.07.02
X.XX	±0.25			
X.XXX	±0.15	CHECK	Lisa	2021.07.02
Angle	± 3°	APPROVE		
DIM	TOL			

2	SCALE	—	 SCONDAR SCONDAR ELECTRONIC LIMITED	
2	UNIT	mm		
2	SIZE	A4		
2	SHEET	1/1	PART NO.	SCT1012WVS—xxE1BE182(6—15P)
2	PROJ.		TITLE:	MX501331 1.00mm PA9T V0 xxPin Beige SMT WY Socket tape and reel package MPQ=1500Pcs/Reel

SCONDA

SCONDAR ELECTRONIC LIMITED

SCT1012WVS-xxE1BE182(6-15P)

MX501331 1.00mm PA9T V0 xxPin Beige SMT WV Socket
tape and reel package MPQ=1500Pcs/Reel