

RoHS





受控

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 300VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing):LCP (UL94V-0)
- Color: Beige
- Material: Phosphor Bronze/Tin Plated
- Weld sheet: Brass/Tin Plated

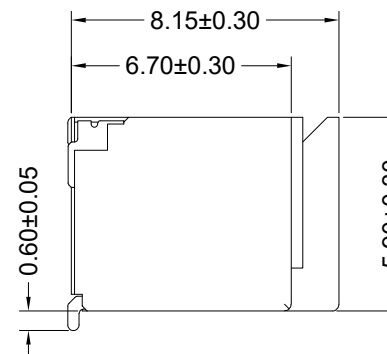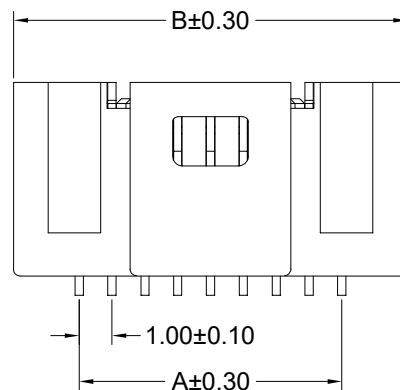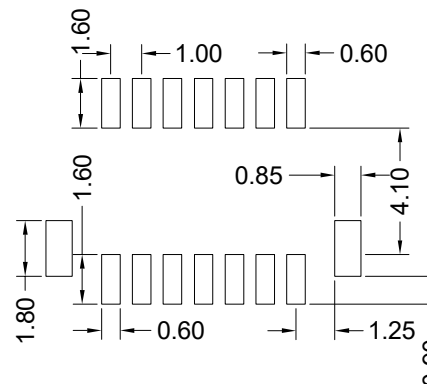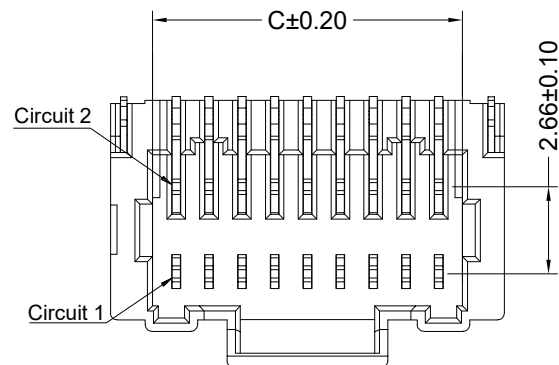

Ordering Information

SCT1014WRS - 2xx F 1 BE 154

No. of Pins
See Table
Insulation
F=LCP
Package
1=Tape&Reel
Color
BE=Beige

PIN	Dimensions			PIN	Dimensions		
	A	B	C		A	B	C
2x2	1.00	5.00	2.45	2x17	16.00	20.00	17.45
2x3	2.00	6.00	3.45	2x18	17.00	21.00	18.45
2x4	3.00	7.00	4.45	2x19	18.00	22.00	19.45
2x5	4.00	8.00	5.45	2x20	19.00	23.00	20.45
2x6	5.00	9.00	6.45	2x21	20.00	24.00	21.45
2x7	6.00	10.00	7.45	2x22	21.00	25.00	22.45
2x8	7.00	11.00	8.45	2x23	22.00	26.00	23.45
2x9	8.00	12.00	9.45	2x24	23.00	27.00	24.45
2x10	9.00	13.00	10.45	2x25	24.00	28.00	25.45
2x11	10.00	14.00	11.45	2x26	25.00	29.00	26.45
2x12	11.00	15.00	12.45	2x27	26.00	30.00	27.45
2x13	12.00	16.00	13.45	2x28	27.00	31.00	28.45
2x14	13.00	17.00	14.45	2x29	28.00	32.00	29.45
2x15	14.00	18.00	15.45	2x30	29.00	33.00	30.45
2x16	15.00	19.00	16.45				

SCONDAR ELECTRONIC, LTD
ENGINEER

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Xiong
Lisa

2016.06.06
2016.06.06
2016.06.07

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
1/1

Part NO.
TITLE:

SCONDAR ELECTRONIC LIMITED
SCT1014WRS-2xxF1BE154
MX1.00mm LCP V0 Beige 2xxPin Brass Tin(Sn) Plating
SMT WR Socket Tape&Reel MPQ=1.5Kpcs