



RoHS

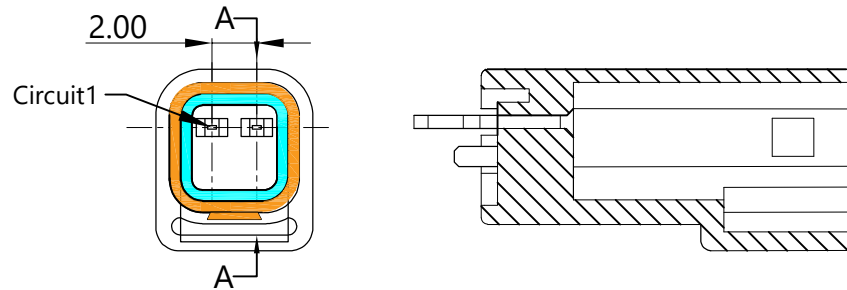

A-A
SEC

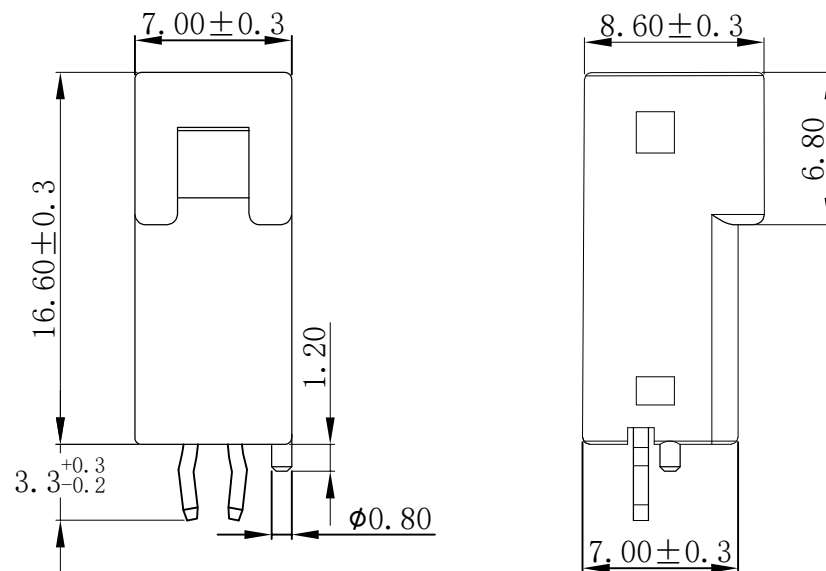

SPECIFICATION:

- Current Rating: 3A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: $\geq 1000M\Omega$ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: $\leq 20m\Omega$.
- Operation Temperature: $-55^{\circ}C$ to $+85^{\circ}C$

Material:

- Pressed pin: Copper alloy, Tin Plated
- Seal ring: silicone rubber (Blue)
- Seal ring bracket: PBT UL94V0 (Yellow)
- Base: glass fiber reinforced PBT UL94V0 natural color (White)

Ordering Information

SCT2019WV - 02 D 0 WT 154

No. of Pins
102=1X2PIN

Insulation
D=PBT

Package
0=PE Bag

Color
WT=White

SCONDAR ELECTRONIC LIMITED
ENGINEER YAO APPROVED

OPERATION

X.X ± 0.35

X.XX ± 0.25

X.XXX ± 0.15

Angle $\pm 3^{\circ}$

DIM TOL

DESIGN

CHECK

APPROVE

YAO

Lisa

2024.04.20

2024.04.22

SCALE

UNIT

SIZE

SHEET

PROJ.

—

mm

A4

1/1

1

1



SCONDAR ELECTRONIC LIMITED

PART NO.

TITLE:

SCT2019WV-02DOWT154

JWPE2.00MM PBT V0 WHITE 02P DIP WV
Copper alloy, Tin Plated SOKCET

AO 2024.04.22

REV DATE

NEW

MODIFICATION DESCRIPTION

CHANGE

APPROVE