


RoHS

受控

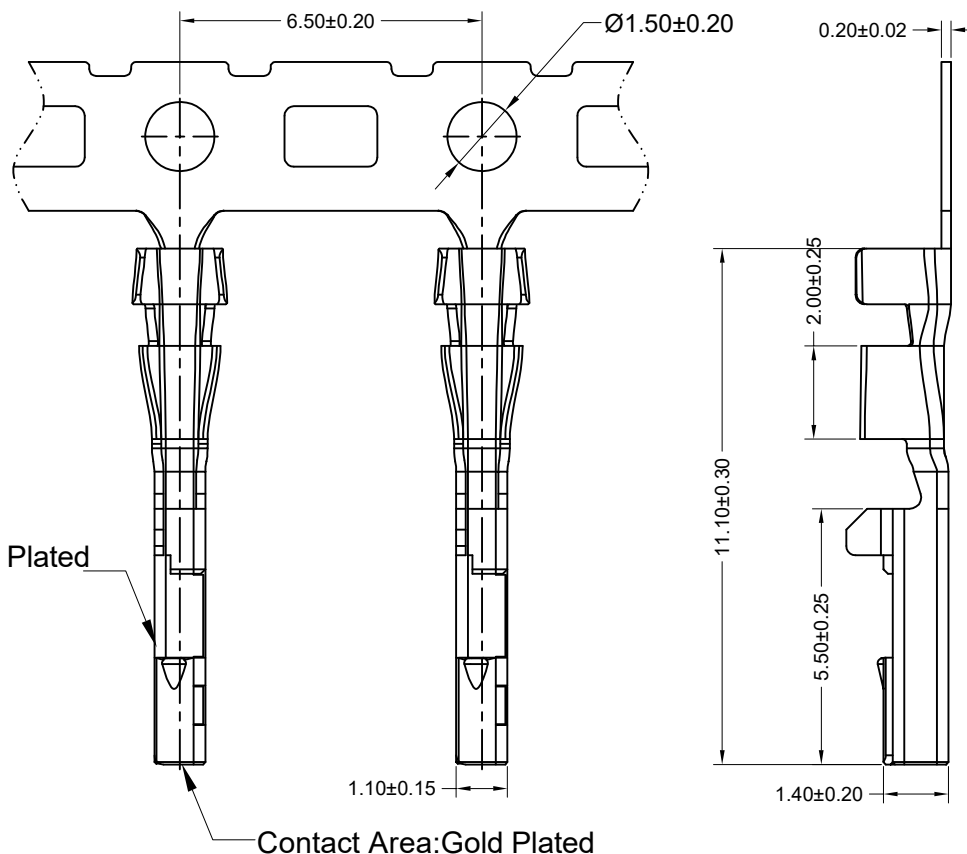

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ(Min)
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 16mΩ(Max).
- Operation Temperature: -40℃ to +120℃

Material:


- Material: Brass
- Finish: Contact Area: Gold Plated.
Barrel area: Tin Plated
- Applicable Wires: 20AWG ~ 24AWG(OD: 1.4mm Max)

Ordering Information

SCT2035T B HG 173

Material:
B=Brass

Contact Plated
Contact Area: Gold Plated.
Barrel area: Tin Plated

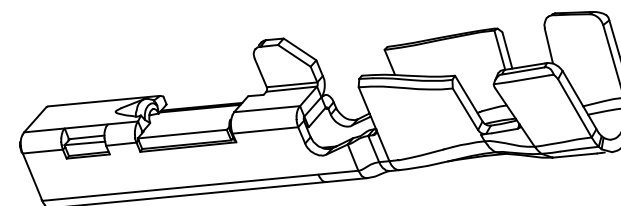

SCONDAR ELECTRONIC, LTD
ENGINEER

OPERATION	
X.X	± 0.30
X.XX	± 0.20
X.XXX	± 0.10
Angle	$\pm 3^\circ$
DIM	TOL

DRAW	
DESIGN	Yao
CHECK	Xiong
APPROVE	Lisa

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR

SCONDAR ELECTRONIC LIMITED

SCT2035TBHG173

CPT 2.00mm Brass Contact Area Gold Plated, Surface: Tin Plated
Terminal 20-24AWG Reel MPQ=5K/PCS