


RoHS

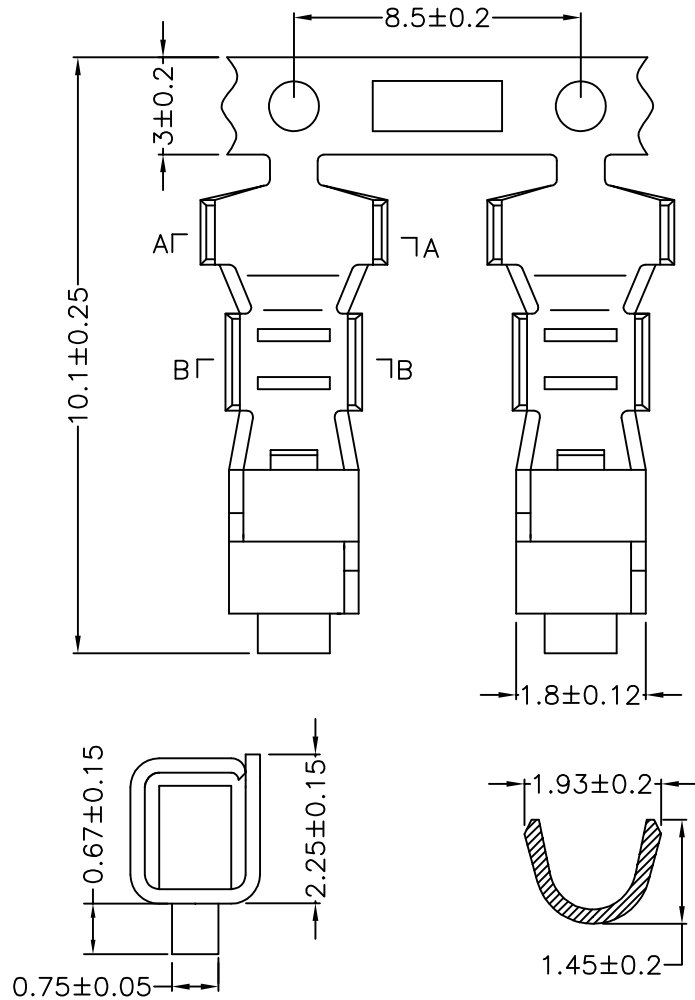

SEC:B-B

SEC:A-A

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: $1000M\Omega$ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: $20m\Omega$ (Max).
- Operation Temperature: $-25^{\circ}C$ to $+85^{\circ}C$

Material:

- Material: Phosphor Bronze T=0.20mm
- Finish: Tin Plated
- Applicable Wires: 22AWG~28AWG(OD1.1-1.8mm)

Ordering Information

SCT2501 FT P S 169

Material
P=Phosphor Bronze

Contact Plated
S=Tin Plated

SCONDAR ELECTRONIC, LTD
ENGINEER 20240806

OPERATION	
X.X	± 0.35
X.XX	± 0.25
X.XXX	± 0.15
Angle	$\pm 3^{\circ}$
DIM	TOL

DRAW	Xiong	2021.10.08
DESIGN		
CHECK	Lisa	2021.10.10
APPROVE		

SCALE	-
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR

SCONDAR ELECTRONIC LIMITED

A0	2021.10.08	NEW
----	------------	-----

REV	DATE	MODIFICATION DESCRIPTION
-----	------	--------------------------

CHANGE	APPROVE
--------	---------

PART NO.	SCT2501FTPS169
----------	----------------

TITLE:	XH2.50mm Phosphor Bronze Tin-plated Female Terminal 22-28AWG MPQ=6KPCS/Reel
--------	---