
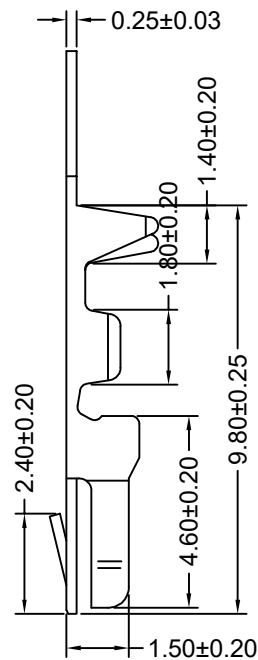


RoHS

受控

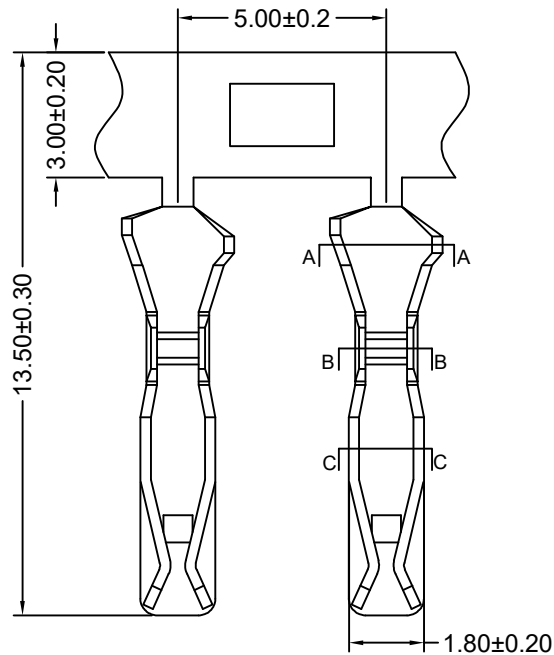

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:


- Material: Phosphor Bronze T=0.20mm
- Finish: Tin Plated
- Applicable Wires: 22AWG~28AWG(OD1.0-1.8mm)

Ordering Information


SCT2523 T P S 169

Material
P=Phosphor Bronze


Contact Plated
S=Tin Plated



C-C



B-B



A-A

SCONDAR ELECTRONIC, LTD
ENGINEER 2505

OPERATION
X.X ± 0.35
X.XX ± 0.25
X.XXX ± 0.15
Angle $\pm 3^\circ$
DIM TOL

DRAW Yao 2021.10.08
DESIGN Xiong 2021.10.08
CHECK Lisa 2021.10.10
APPROVE

SCALE -
UNIT mm
SIZE A4
SHEET 1/1
PROJ.

Yao 2021.10.08
Xiong 2021.10.08
Lisa 2021.10.10

SCALE -
UNIT mm
SIZE A4
SHEET 1/1
PROJ.

PART NO.
TITLE:

SCONDAR ELECTRONIC LIMITED

SCT2523TPS169

XHD 2.50mm Phosphor Bronze Tin-Plated Male Terminal
22-28AWG MPQ=12Kpcs/Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	2021.10.08	NEW		