
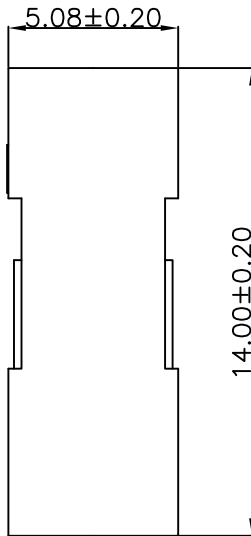
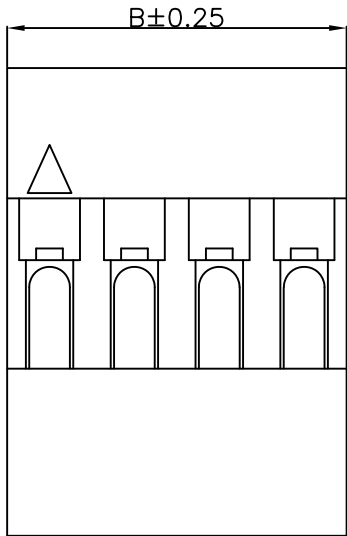
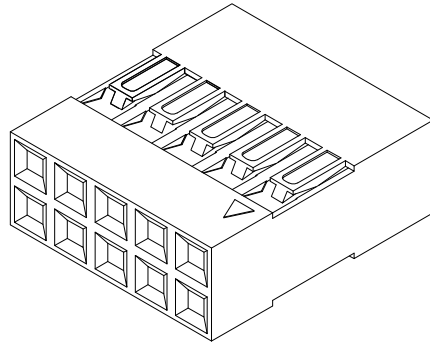


RoHS

2.54±0.05



东莞市晟凯达电子科技有限公司
工程专用章

受控

Specification:

- Current Rating: 3A AC/DC
- Voitage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing): PBT (UL94V-2)
- Color: Black

Ordering Information

SCT2543H -2xx D BK 116

No.of Pins
See Table

Insulation
D=PBT

Color
BK=Black

	2*40	99.06	101.60
	2*39	96.52	99.06
	2*38	93.98	96.52
	2*4	7.62	10.16
	2*3	5.08	7.62
	2*2	2.54	5.08
Poles	A		B
	Dimensions		

					OPERATION		DRAW	Peng	2021.07.07	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN			UNIT	mm		
A1	2021.07.07	Changed from SCT2543H-2xxP to SCT2543H-2xxDBK116	_____	_____	X.XX	±0.25				SIZE	A4		
A0	2019.10.15	NEW	_____	_____	X.XXX	±0.15	CHECK	Lisa	2021.07.07	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE	Allen	2021.07.07	PROJ.		TITLE:	Dupont 2.54mm Pitch Housing Connector
					DIM	TOL							