


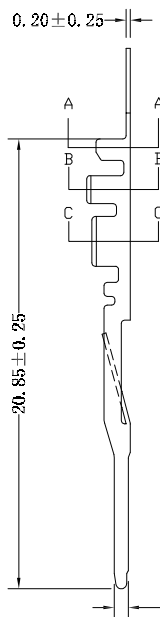



RoHS

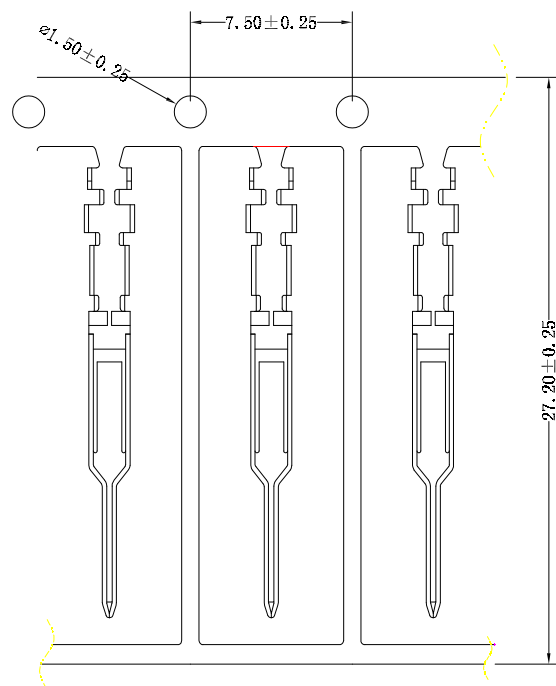

A-A



B-B



C-C

SPECIFICATIONS :

Voltage Rating: 250V AC / DC

Current Rating: 4A AC / DC

Withstanding Voltage: 1000V AC/minut

Temperature Range: -25°C~+85°C

Insulation Resistance: 1000MΩ Min.


Contact Resistance: 20mΩ Max.

- ① Series No.:
- ② Category: T- Terminal
- ③ Terminal Type: M-Mate With Female Housing,
- ④ Feature Type: A-Double belt
- ⑤ Material: P-Phosphor Bronze,
Plating : M-Matte Tin Plated

东莞市晟凯达电子科技有限公司
工程专用章

受控

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
SCT2543MT	AWG#22-#26	1.55mm(max)	Phosphor Bronze	Fog Tin-plated	10,000pcs

					OPERATION		DRAW	Yang	2022.06.14	SCALE	—	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35	DESIGN			UNIT	mm			
					X.XX	±0.25				SIZE	A4			
A0	2022.0.03				X.XXX	±0.15	CHECK	Lisa	2022.06.14	SHEET	1/1	PART NO.	SCT2543MTPS107	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'	APPROVE			PROJ.		TITLE:	AMP2.54 phosphor Bronze Tin-plated Male Terminal	
					DIM	TOL								