


RoHS

受控

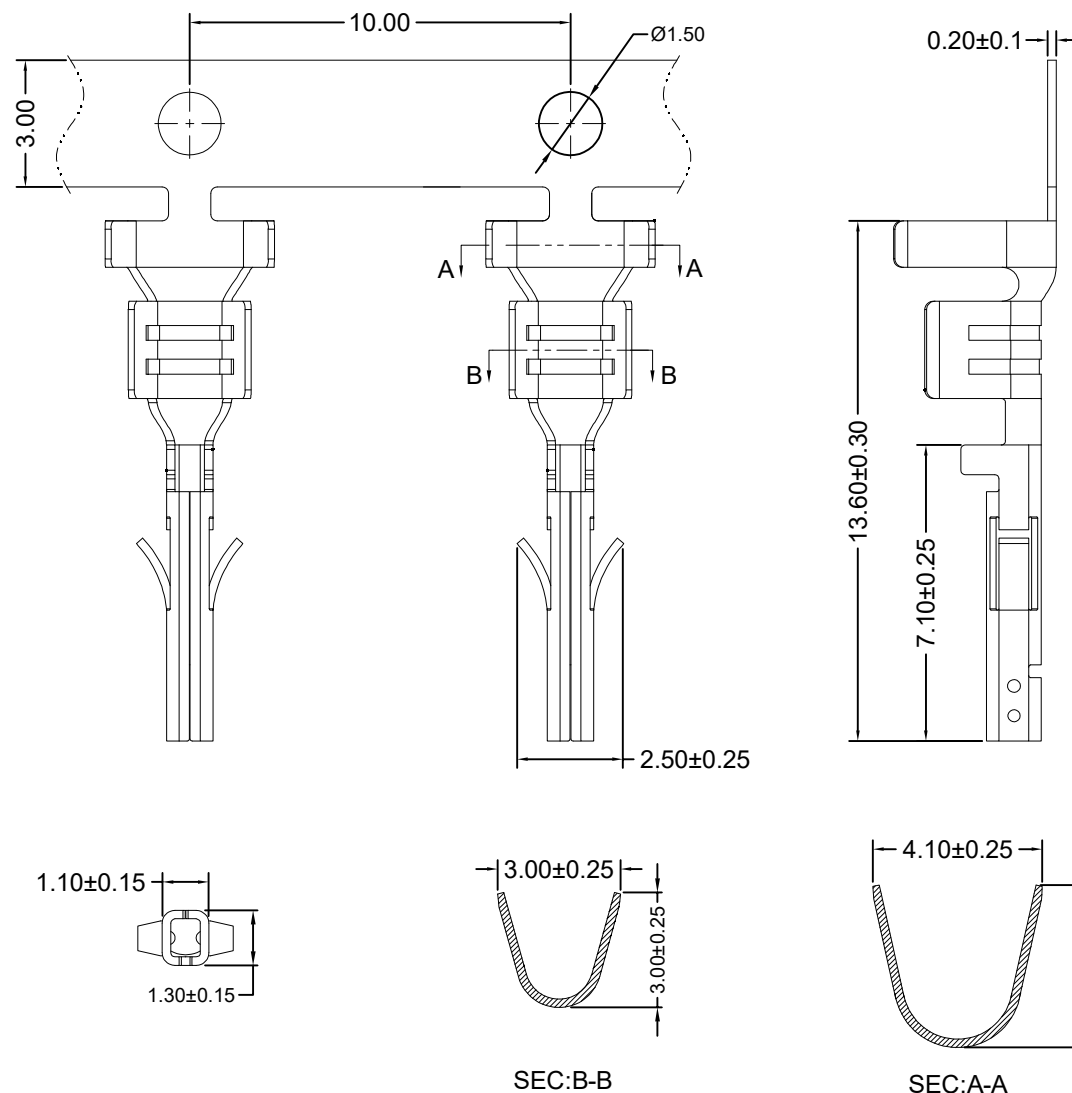

Specification:

- Voltage Rating:250V AC/DC
- Current Rating: 8A AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Material: High conductivity copper alloy
- Finish: Tin Plated
- Applicable Wires: 18AWG~16AWG
- Terminal/Housing Retention Force:1.0kgf Min

Ordering Information

SCT3002FT A K S 173

High Foot

Material:
K=High conductivity copper alloy

Contact Plated
S=Tin Plated
G=Gold Plated

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2503

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Xiong
Lisa

2016.07.06
2016.07.06
2016.07.07

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
1/1

Part No.

TITLE:

SCONDAR ELECTRONIC LIMITED
SCT3002FTAKS173
3.0mmPitch High conductivity copper alloy Tin Plating High Foot Female Terminal 18-16AWG MPQ=6KPCS/Reel