
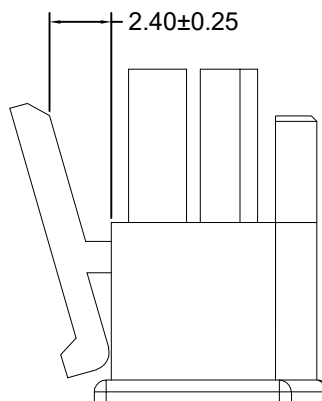


RoHS

受控

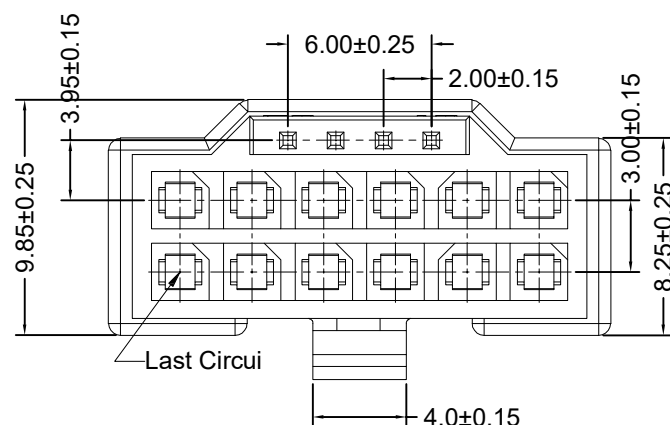

Specification:

- Voltage Rating: 250V AC/DC
- Current Rating: 8A AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:



- Hsulator: PA66(UL94V-0);
- Color: Black
- 12+4 Circuits available

Ordering Information

SCT3002MH -12+4 B BK 173

No. of Pins
12PIN=3.0mm Pitch
4PIN=2.0mm Pitch

Insulation
B=PA66 V0
Color
BK=Black

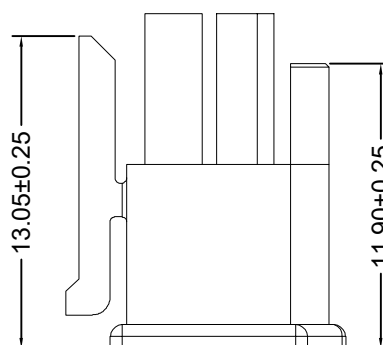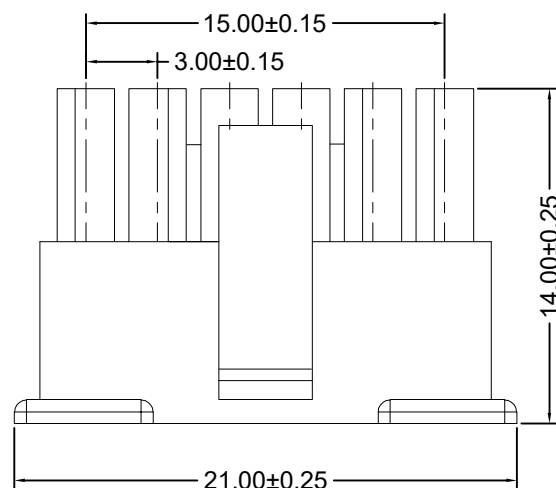

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2503

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao

2016.07.06

SCALE

—

Xiong

2016.07.06

UNIT

mm

Lisa

2016.07.07

SIZE

A4

APPROVE

SHEET

1/1

Part No.

TITLE:

SCONDAR

SCONDAR ELECTRONIC LIMITED

SCT3002MH-12+4BBK173

PCIe6.0 3.0mmPitch(12P)+2.0mmPitch(4P) 12+4Pin PA66 V0
Black Male Housing

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Yao	2016.07.06	SCALE	—	SCONDAR	SCONDAR ELECTRONIC LIMITED
A0	2016.07.06	NEW	—	—	X.X ±0.30	DESIGN	Xiong	2016.07.06	UNIT	mm		
					X.XX ±0.20	CHECK	Lisa	2016.07.07	SIZE	A4		
					X.XXX ±0.10	APPROVE			SHEET	1/1	Part No.	SCT3002MH-12+4BBK173
					Angle ±3°				PROJ.	◆	TITLE:	PCIe6.0 3.0mmPitch(12P)+2.0mmPitch(4P) 12+4Pin PA66 V0 Black Male Housing
					DIM TOL							