



RoHS


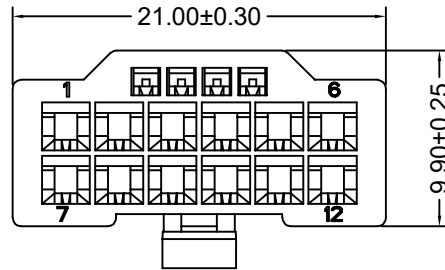


Specification:

- Voltage Rating:250V AC/DC
- Current Rating: 9A AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -45℃ to +105℃

Material:

- Hsulator:PA66(UL94V-0);
- Color:Black
- PWR&GND PIN:High Conductivity Copper
- Contacts:High conductivity copper
- Sense PIN:Phosphor Bronze
- Coating:Gold Plating&Tin Plating

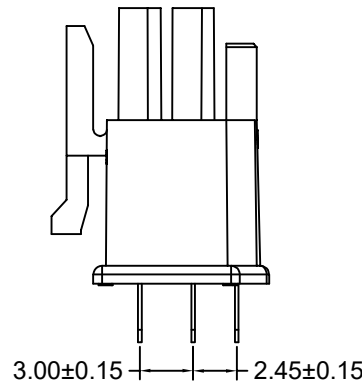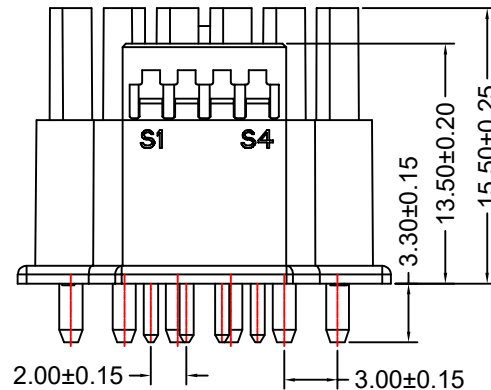

Ordering Information

SCT3002 MWV- 12+4 B 0 BK 317

MWV= 180° Male Wafer No.of Pins
12PIN=3.0mm Pitch 4PIN=2.0mm Pitch

Insulation B=PA66 Package 0=Bag Color BK=Black

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2503

OPERATION
X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
Angle ± 3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

YAO
Xiong
Lisa

2016.05.10
2016.05.10
2016.05.12

SCALE
UNIT
SIZE
SHEET
PROJ.

-
mm
A4
1/1
⌀

SCONDAR

SCONDAR ELECTRONIC LIMITED

PART NO.
TITLE:

SCT3002MWV-12+4B0BK317
3.0mmPitch(12P)+2.0mmPitch(4P) 12+4Pin PA66 V0
Black 180° DIP Male WV Socket