

RoHS







受控

Specification:

- Voltage Rating:250V AC/DC
- Current Rating: 9A AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -45℃ to +105℃

Material:

- Insulator (Housing):PA9T(UL94V-0);
- Color:Black
- Contact:Red copper(C1100)
- Sense PIN:Brass
- Board Lock:Phosphor Bronze
- Finish: Tin Plated

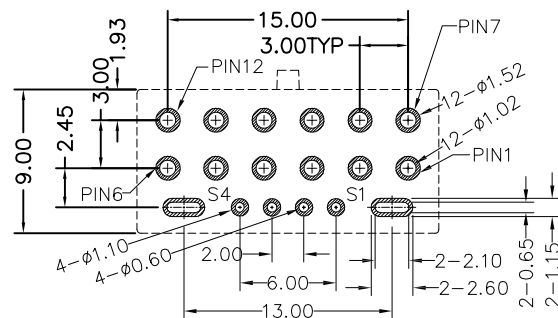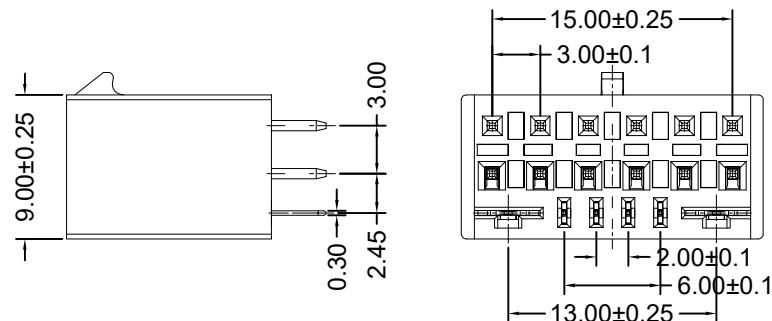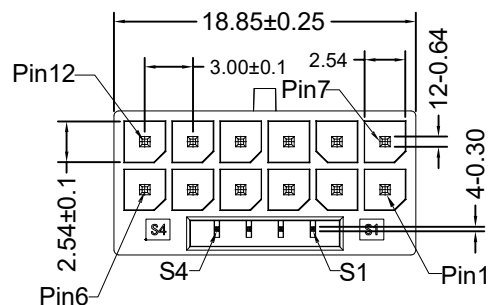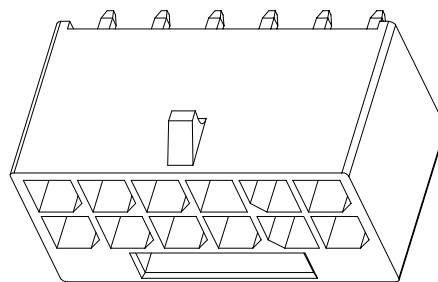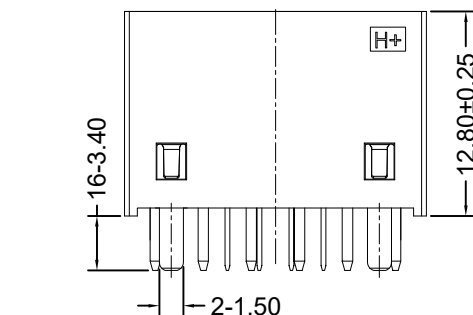

PCB LAYOUT

Ordering Information

SCT3002WV- 12+4 E 2 BK 173

No. of Pins
12PIN=3.0mm Pitch
4PIN=2.0mm Pitch

Insulation
E=PA9T

Package
2=Tube

Color
BK=Black

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2503

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

DESIGN

CHECK

APPROVE

Yao

Xiong

Lisa

2016.07.06

2016.07.06

2016.07.07

SCALE

UNIT

SIZE

SHEET

PROJ.

TITLE:



SCONDAR ELECTRONIC LIMITED

Part No.

TITLE:

SCT3002WV-12+4E2BK173

3.0mmPitch(12P)+2.0mmPitch(4P) 12+4Pin PA9T V0
Black 180° DIP WV Socket 30PCS/Tube