
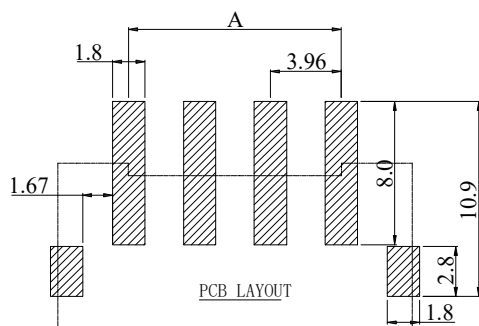
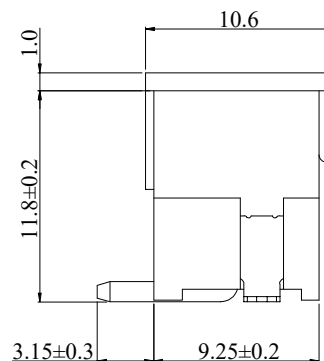
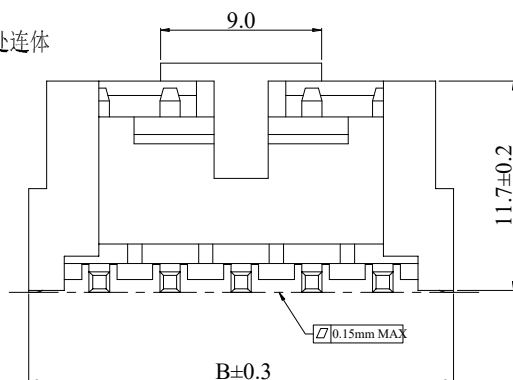
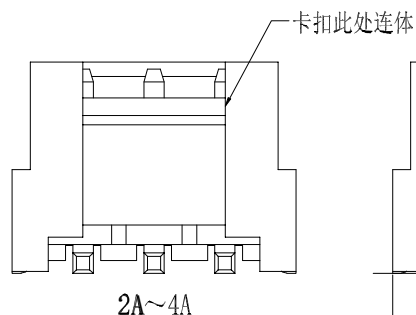


RoHS

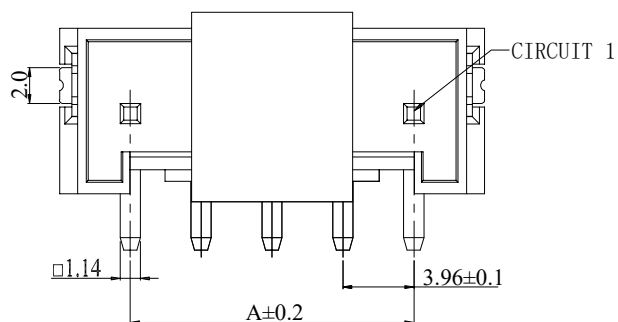

技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC DC
Voltage rating: 250V AC DC
- ◆ 额定电流: 7.0A AC DC MAX.
Current rating: 7.0A AC DC MAX.
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 绝缘电阻: $1000M\Omega$ MIN
Insulation resistance: $1000M\Omega$ MIN
- ◆ 接触电阻: 0.02Ω MAX(初始值)
Contact resistance: 0.02Ω MAX
- ◆ 工作温度: $-25^{\circ}\sim+105^{\circ}$
Working Temperature: $-25^{\circ}\sim+105^{\circ}$
- ◆ 间距: 3.96 mm
Pitch: 3.96 mm

材料 (MATERIAL)

- ◆ 绝缘体: 尼龙9T UL94V-0
Insulator: PA9T UL94V-0
- ◆ 接触针: 黄铜镀锡
Contact PIN: Brass TIN-plating
- ◆ 焊片: 磷青铜镀锡
Solder tab: Phosphor bronze TIN-plating
- 盖子: 尼龙46
CAP: PA46

Ordering Information

SCT3961WVS - xx E 1 BE 102

No. of Pins See Table
Insulation E=PA9T V0
Package 1=Tape&Reel
Color BE=Beige

POLES	P/N	A	B
2	SCT3961WVS-02E1BE102	3.96	11.88
3	SCT3961WVS-03E1BE102	7.92	15.84
4	SCT3961WVS-04E1BE102	11.88	19.80
5	SCT3961WVS-05E1BE102	15.84	23.76
6	SCT3961WVS-06E1BE102	19.80	27.72
7	SCT3961WVS-07E1BE102	23.76	31.68
8	SCT3961WVS-08E1BE102	27.72	35.64
9	SCT3961WVS-09E1BE102	31.68	39.60
10	SCT3961WVS-10E1BE102	35.64	43.56
11	SCT3961WVS-11E1BE102	39.60	47.52
12	SCT3961WVS-12E1BE102	43.56	51.48
13	SCT3961WVS-13E1BE102	47.52	55.44
14	SCT3961WVS-14E1BE102	51.48	59.40
15	SCT3961WVS-15E1BE102	55.44	63.36
16	SCT3961WVS-16E1BE102	59.40	67.32

					OPERATION		DRAW	YANG	2018.09.21	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.30	DESIGN			UNIT	mm		
					X.XX	±0.20				SIZE	A4		
					X.XXX	±0.10	CHECK	Lisa	2018.09.21	SHEET	1/1	Part NO	SCT3961WVS-xxE1BE102
A0	2018.09.21	NEW		—	—	Angle	±3°						
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.		TITLE:	VIB. 96mm Pitch SMT Surface Mount Vertical Single Row Header xxPin PA9T V0 Beige Tin(Sn) Plating Tape and Reel MPQ=1.5KPCS