

RoHS

受控

Specification:

- Operation Temperature: -25℃ to +85℃
- Insulator (Housing): PA66 (UL94V-2)
- Color: White




Ordering Information

SCT3963HSV - xx C WT 180

No.of Pins
See Table

Insulation
C=PA66 V2

Color
WT=White

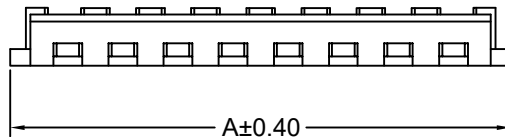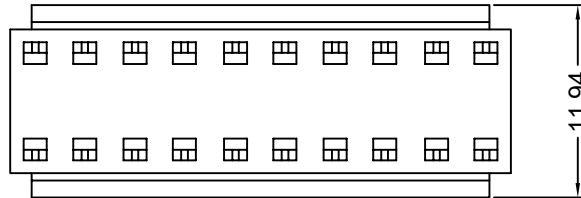

Poles	Dimensions		Poles	Dimensions
	A			A
2	7.92		11	43.56
3	11.88		12	47.52
4	15.84		13	51.48
5	19.80		14	55.44
6	23.76		15	59.40
7	27.72		16	63.36
8	31.68		17	67.32
9	35.64		18	71.28
10	39.60			

SCONDAR ELECTRONIC, LTD
ENGINEER 2504

OPERATION		
X.X	±0.35	
X.XX	±0.25	
X.XXX	±0.15	
Angle	± 3°	
DIM	TOL	

DRAW	Yao	2021.07.07
DESIGN	Xiong	2021.07.07
CHECK	Lisa	2021.07.07
APPROVE		

SCALE	—
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	☞

SCONDAR

SCONDAR ELECTRONIC LIMITED

A0	2021.07.07	NEW										PART NO.	SCT3963HSV-xxCWT180	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE								TITLE:	3.96mm PA66 V2 xxPin 180° IDC Housing White Clasp	