

RoHS

受控

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -45°C to +105°C



Material:

- Insulator (Housing): PA66 (UL94V-2)
- Color: White
- Contacts:Brass/Tin Plated



Ordering Information

SCT3963WV - xx C 0 WT 180

No.of Pins
See Table
Insulation
C=PA66 V2
Package
0=PE Bag
Color
WT=White

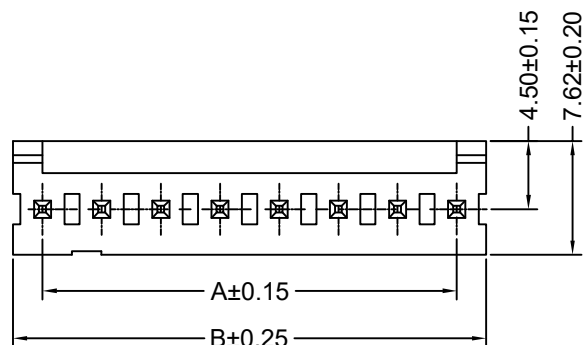

P.C.B. Hole Layout

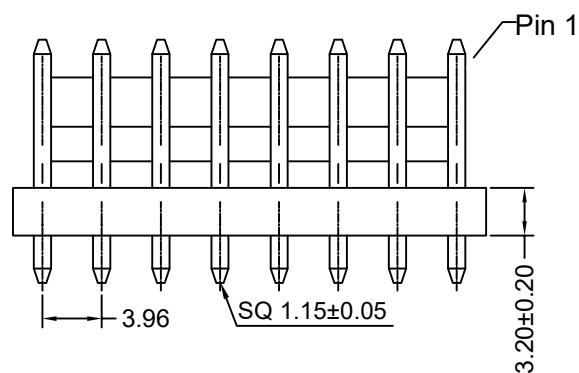

Dimensions		Part NO	PIN
A	B		
3.96	7.92	SCT3963WV-02C0WT180	2
7.92	11.88	SCT3963WV-03C0WT180	3
11.88	15.84	SCT3963WV-04C0WT180	4
15.84	19.80	SCT3963WV-05C0WT180	5
19.80	23.76	SCT3963WV-06C0WT180	6
23.76	27.72	SCT3963WV-07C0WT180	7
27.72	31.68	SCT3963WV-08C0WT180	8
31.68	35.64	SCT3963WV-09C0WT180	9
35.64	39.60	SCT3963WV-10C0WT180	10
39.60	43.56	SCT3963WV-11C0WT180	11
43.56	47.52	SCT3963WV-12C0WT180	12
47.52	51.48	SCT3963WV-13C0WT180	13
51.48	55.44	SCT3963WV-14C0WT180	14
55.44	59.40	SCT3963WV-15C0WT180	15
59.40	63.36	SCT3963WV-16C0WT180	16
63.36	67.32	SCT3963WV-17C0WT180	17
67.32	71.28	SCT3963WV-18C0WT180	18

SCONDAR ELECTRONIC,LTD
ENGINEER 2504

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Xiong
Lisa

2021.07.07
2021.07.07
2021.07.08

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
1/1

Part No.
TITLE:

3.96mm PA66 V2 White xxPin Brass Tin Plated Short
backrest DIP WV Sokcet MPQ=1KPs/Bag

SCONDAR ELECTRONIC LIMITED

SCT3963WV-xxC0WT180