

RoHS

受控

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 200V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 40mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing): PA9T(UL94V-0)
- Contacts: Phosphoric Bronze/Tin Plated
- Solder pad: Phosphoric Bronze/Tin Plated
- Color: Beige

Ordering Information

SCT1255WRS - xx E 1 BE 143






No. of Pins
See Table

Insulation
E=PA9T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

Color
BE=Beige

PIN	Dimensions		PIN	Dimensions	
	A	B		A	B
2	1.25	6.10	17	20.00	24.85
3	2.50	7.35	18	21.25	26.10
4	3.75	8.60	19	22.50	27.35
5	5.00	9.85	20	23.75	28.60
6	6.25	11.10	21	25.00	29.85
7	7.50	12.35	22	26.25	31.10
8	8.75	13.60	23	27.50	32.35
9	10.00	14.85	24	28.75	33.60
10	11.25	16.10	25	30.00	34.85
11	12.50	17.35	26	31.25	36.10
12	13.75	18.60	27	32.50	37.35
13	15.00	19.85	28	33.75	38.60
14	16.25	21.10	29	35.00	39.85
15	17.50	22.35	30	36.25	41.10
16	1.25	23.60			

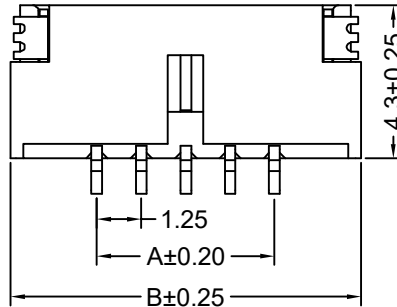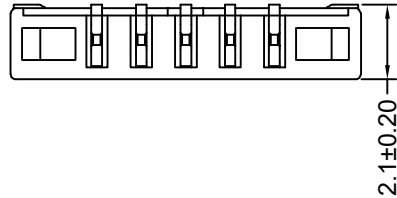

SCONDAR ELECTRONIC, LTD
ENGINEER 2504

OPERATION
X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
Angle ± 3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Xiong
Lisa

2021.07.05
2021.07.05
2021.07.06

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
Φ

SCONDAR

SCONDAR ELECTRONIC LIMITED

PART NO. SCT1255WRS-xxE1BE143

TITLE: JAE 1.25mm(FI-S) PA9T V0 Beige xxPin Phosphor Bronze Tin Plated

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	2021.07.05	NEW		