
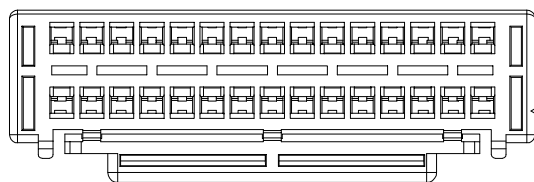

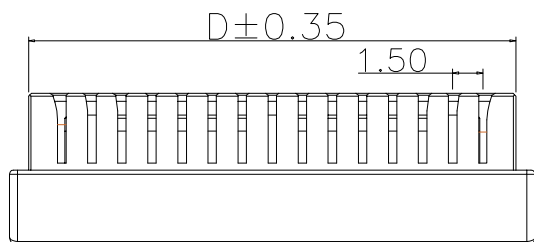
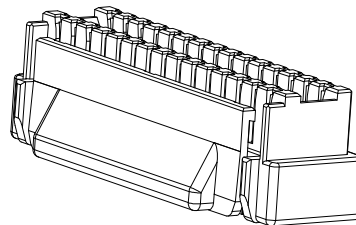


RoHS

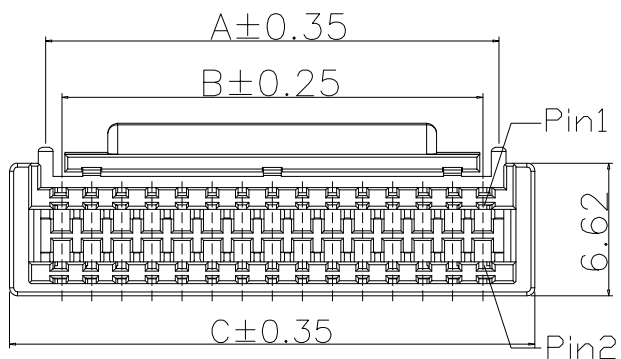

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: White

Ordering Information

SCT1507H-2XX B 0 WT 164

No. of Pins See Table
 Insulation B=PA66 V0
 Package 0=PE Bag
 Color WT=White

Dimensions				PIN
A	B	C	D	
7.50	6.00	11.20	9.30	2*5
9.00	7.50	12.70	10.80	2*6
10.50	9.00	14.20	12.30	2*7
12.00	10.50	15.70	13.80	2*8
13.50	12.00	17.20	15.30	2*9
15.00	13.50	18.70	16.80	2*10
16.50	15.00	20.20	18.30	2*11
18.00	16.50	21.70	19.80	2*12
19.50	18.00	23.20	21.30	2*13
21.00	19.50	24.70	22.80	2*14
22.50	21.00	26.20	24.30	2*15
24.00	22.50	27.70	25.80	2*16
25.50	24.00	29.20	27.30	2*17
27.00	25.50	30.70	28.80	2*18
28.50	27.00	32.20	30.30	2*19
30.00	28.50	33.70	31.80	2*20

SCONDAR ELECTRONIC, LTD
ENGINEER APPROVED LIAO

					OPERATION	DRAW	Zhong	2019.07.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.30	DESIGN			UNIT	mm	
					X.XX ±0.20	CHECK	Lisa	2019.07.06	SIZE	A4	
A0		NEW			X.XXX ±0.10	APPROVE			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	EDIM	TOL	APPROVE		PROJ	Part No	SCT1507H-2xxB0WT164
										TITLE:	ZPD 1.5mm PA66 V0 2XXP White Housing