


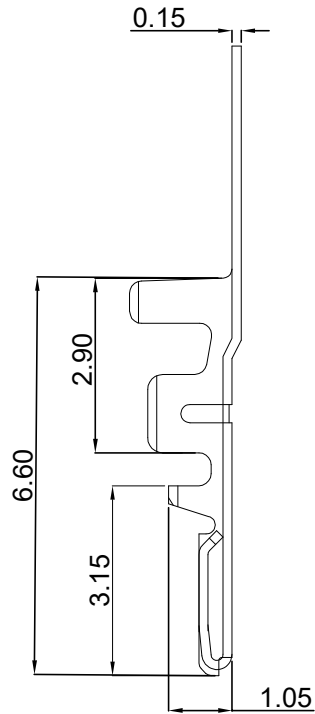


RoHS


受控

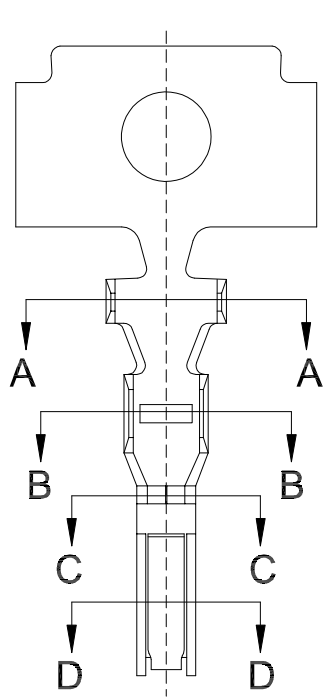


SECTION D-D



SECTION C-C



SECTION B-B



SECTION A-A

Specification:
-Current Rating: 2A AC/DC
-Voltage Rating: 100V AC/DC
-Insulation Resistance: 500MΩ Min
-Withstanding Voltage: 500VAC(1Min)
-Contact resistance: 30mΩ(Max).
-Operation Temperature: -25℃ to +105℃
Material:
-Wire range:24-28AWG(OD:1.20mm Max)
-Material: Phosphor bronze
-Finish: Tin Plated

Ordering Information

SCT1507 T P S 164

Material: P=Phosphor Bronze
Contact Plated S=Tin Plated

SCONDAR ELECTRONIC, LTD
ENGINEER 2505

OPERATION	
X. X	±0.30
X. XX	±0.20
X. XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Xiong	2016. 11. 22
DESIGN	Lyao	2016. 11. 23
CHECK	Lisa	2016. 11. 23
APPROVE		

SCALE	—
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	☯

 SCONDAR ELECTRONIC LIMITED	
Part No.	SCT1507TPS164
TITLE:	ZPD1.5mm Phosphor bronze Tin Plated Terminal 24-28AWG Reel MPO=15Kpcs



SCONDAR ELECTRONIC LIMITED