

RoHS

Recommended P.C.B Layout
General Tolerance ± 0.05

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000M Ω Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20m Ω (Max).
- Operation Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C



Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Contacts: Brass Tin Plated
- Color: Beige

Ordering Information

SCT2004WR - 2** B 0 BE 102

No. of Pins See Table
Insulation B=PA66
Package 0=PE Bag
Color BE=Beige

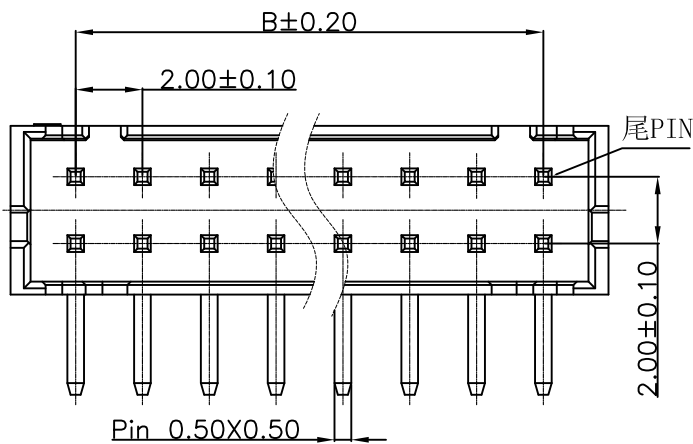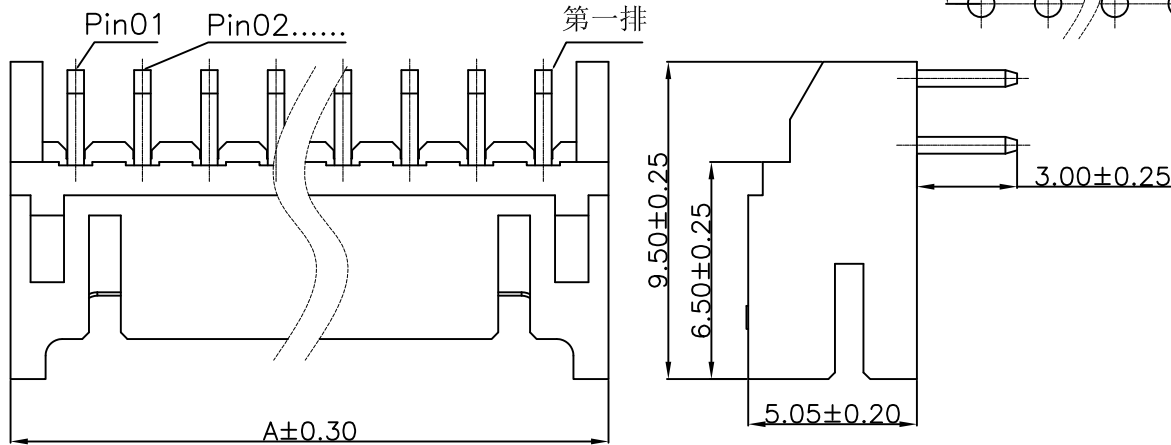

2*10	22.00	18.00			
2*9	20.00	16.00	2*17	36.00	32.00
2*8	18.00	14.00	2*16	34.00	30.00
2*7	16.00	12.00	2*15	32.00	28.00
2*6	14.00	10.00	2*14	30.00	26.00
2*5	12.00	8.00	2*13	28.00	24.00
2*4	10.00	6.00	2*12	26.00	22.00
2*3	8.00	4.00	2*11	24.00	20.00
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	UNIT	mm	SCONDAR ELECTRONIC LIMITED
A1	2021.07.10	Changed from SCT2004WR-2xxP to SCT2004WR-2xxB0BE102			X.X	DESIGN				mm		
AO	2010.05.15	NEW			X.XXX	CHECK	Lisa	2021.07.10		A4		PART NO. SCT2004WR-2xxB0BE102
					Angle	APPROVE	Allen	2021.07.10		1/1		
					DIM							