






RoHS

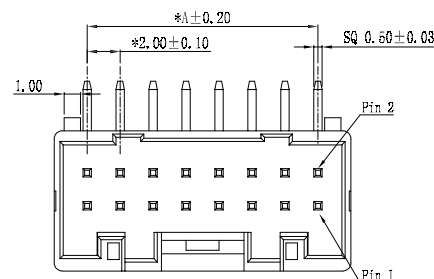


04P~10P







12P~18P



20P~40P



04P~10P Without Guideway
12P~40P With Guideway

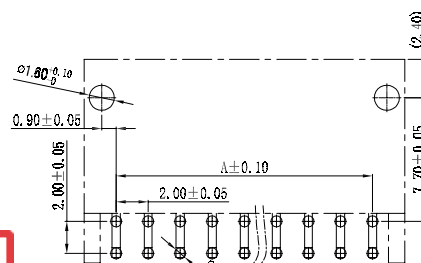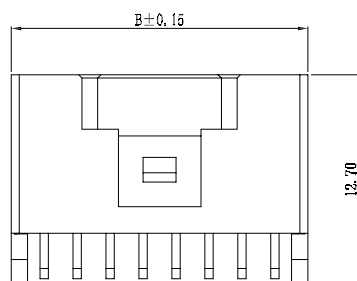

P.C.B LAYOUT

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 10mΩ (Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing): PA46 (UL94V-0)
- Color: Beige
- Contacts: Brass/Tin Plated
- Soldering lug: Brass/Tin Plated

Ordering Information

SCT2020WR - xx G 3 BE 175

No. of Pins
See Table
Insulation
G=PA46 V0
Package
0=bag
1= reel
2=tube
3=tray
Color
BE=Beige

Dimensions		Part NO	PIN
A	B		
2.00	6.00	SCT2020WR-202G3BE175	2x02
4.00	8.00	SCT2020WR-203G3BE175	2x03
6.00	10.00	SCT2020WR-204G3BE175	2x04
8.00	12.00	SCT2020WR-205G3BE175	2x05
10.00	14.00	SCT2020WR-206G3BE175	2x06
12.00	16.00	SCT2020WR-207G3BE175	2x07
14.00	18.00	SCT2020WR-208G3BE175	2x08
16.00	20.00	SCT2020WR-209G3BE175	2x09
18.00	22.00	SCT2020WR-210G3BE175	2x10
20.00	24.00	SCT2020WR-211G3BE175	2x11
22.00	26.00	SCT2020WR-212G3BE175	2x12
24.00	28.00	SCT2020WR-213G3BE175	2x13
26.00	30.00	SCT2020WR-214G3BE175	2x14
28.00	32.00	SCT2020WR-215G3BE175	2x15
30.00	34.00	SCT2020WR-216G3BE175	2x16

					OPERATION	DRAW	Zhong	2020. 11. 02	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X. X ±0.30	DESIGN			UNIT	mm		
					X. XX ±0.20	CHECK	Lisa	2020. 11. 02	SIZE	A4		
AO		NEW			X. XXX ±0.10	APPROVE			SHEET	1/1	Part No.	SCT2020WR-2xxG3BE175
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.	◆	TITLE:	PUD2.00mm right Angle double row header 2xxPin PA46 V0 beige tin (Sn) plated
					DIM TOL							