

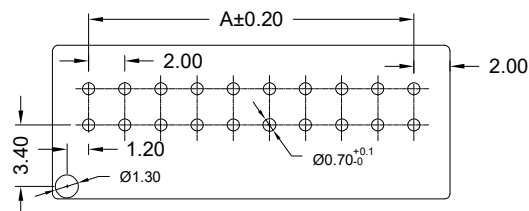




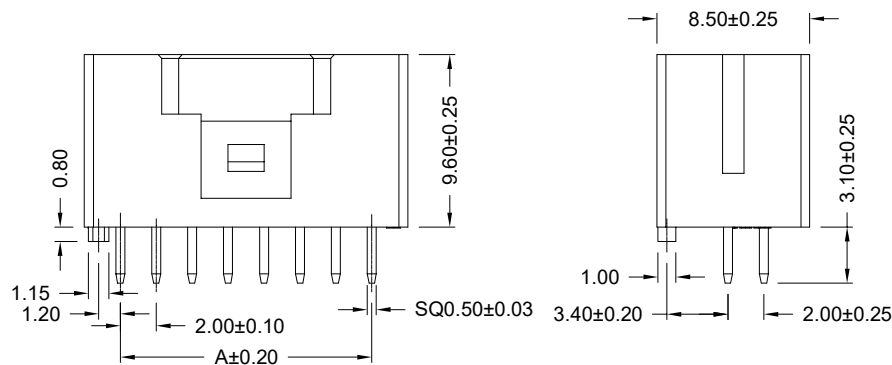



RoHS



P. C. B LAYOUT



- Specification:
- Current Rating: 3A AC/DC
 - Voltage Rating: 250V AC/DC
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 800VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing): PA46 (UL94V-0)
- Color: Beige
- Contacts: Brass/Tin Plated
- Soldering lug: Brass/Tin Plated

Ordering Information

SCT2020WV - 2xx G 0 BE 175

No. of Pins
See Table

Insulation
G=PA46 V0

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray&Box

Color
BE=Beige

Dimensions		Part NO	PIN
A	B		
2.00	6.00	SCT2020WV-202G3BE175	2x02
4.00	8.00	SCT2020WV-203G3BE175	2x03
6.00	10.00	SCT2020WV-204G3BE175	2x04
8.00	12.00	SCT2020WV-205G3BE175	2x05
10.00	14.00	SCT2020WV-206G3BE175	2x06
12.00	16.00	SCT2020WV-207G3BE175	2x07
14.00	18.00	SCT2020WV-208G3BE175	2x08
16.00	20.00	SCT2020WV-209G3BE175	2x09
18.00	22.00	SCT2020WV-210G3BE175	2x10
20.00	24.00	SCT2020WV-211G3BE175	2x11
22.00	26.00	SCT2020WV-212G3BE175	2x12
24.00	28.00	SCT2020WV-213G3BE175	2x13
26.00	30.00	SCT2020WV-214G3BE175	2x14
28.00	32.00	SCT2020WV-215G3BE175	2x15
30.00	34.00	SCT2020WV-216G3BE175	2x16

SCONDAR ELECTRONIC, LTD
ENGINEER

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Zhong
Lisa

2020.11.02
2020.11.02

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
1/1

Part No.
TITLE:

SCT2020WV-2xxG3BE175
PUD2.0mm PA46 V0 Beige xxPin DIP WV double row header Tin (Sn) Plated Tray&Box

SCONDAR

SCONDAR ELECTRONIC LIMITED