


RoHS

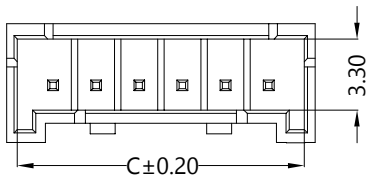



04P~20P Shape




02P~03P Shape




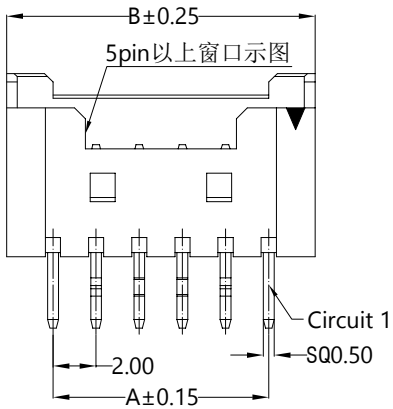

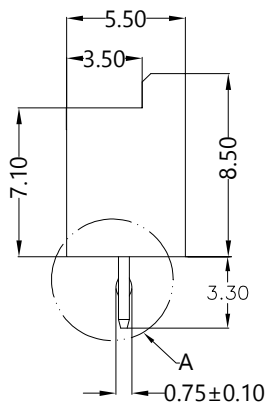



Detail A
SCALE 2:1

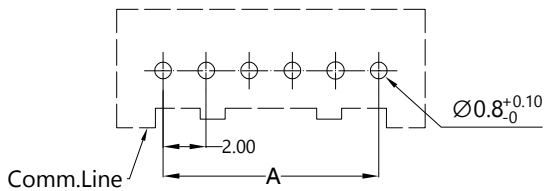

Recommended P.C.B Layout
General Tolerance±0.05

Specification:
-Current Rating:2A AC/DC
-Voitage Rating: 125V AC/DC
-Withstanding voltage:1000V AC/minute
-Insulation Resistance:≥1000MΩMin
-Contact resistance:≤20mΩ(Max)
-After environmental testing:≤30mΩ
-Operation Temperature:-40° to+105°

Material:
-Material: PA9T UL94V-0
-Plating Category: Bright Tin Plating
Matte Tin Plating
-Color:Beige

Ordering Information

SCT2026WV - xx E 0 BE 128

- xx: No.of Pins See Table
- E: Insulation B=PA66 V0, E=PA9T V0
- 0: Package 0=PE Bag
- BE: Color BK=Black, NA=Natural, BE=Beige

With Kink to Choose the type(A Or B)

PIN NO / PoLes / TYPE	1	2	3	4	5	6	N-2	N-1	N
6 PIN Over	-	A	B	-	-	-	B	A	-
6 PIN	-	A	B	B	A	-			
5 PIN	A	B	-	B	A				
4 PIN	A	B	B	A					
3 PIN	A	B	A						
2 PIN	A	B							

Poles	Dlmenslons(mm)			Poles	Dlmenslons(mm)		
	A	B	C		A	B	C
2	2.00	7.70	5.30	9	16.20	20.50	19.60
3	4.00	9.70	7.30	10	18.20	22.50	21.60
4	6.00	10.30	9.30	11	20.20	24.60	23.60
5	8.00	12.30	11.30	12	22.20	26.60	25.70
6	10.00	14.30	13.30	13	24.20	28.70	27.70
7	12.10	16.40	15.50	14	26.20	30.70	29.70
8	14.10	18.40	17.50	15	28.30	32.80	31.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0		NEW	———	———

SCONDAR ELECTRONIC,LTD
ENGINEER APPROVED LIAO

OPERATION		DRAW	Zhog	2023.07.08
X.X	±0.30			
X.XX	±0.20	DESIGN		
X.XXX	±0.10	CHECK	Lisa	2023.07.08
Angle	±3°			
DIM	TOL	APPROVE		

SCALE	—	SCONDAR ELECTRONIC LIMITED	
UNIT	mm		
SIZE	A4		
SHEET	1/1	Part No.	SCT2026WV-xxE0BE128
PROJ.		TITLE:	MX2.00mm 35362 Sherlock Wire-to-Board Header Vertical with Positive Lock XX Circuits PA9T V0 Tails Beige