

RoHS















受控

Specification:
-Current Rating: 3A AC/DC
-Voltage Rating: 50V AC/DC
-Insulation Resistance: 100MΩ(Min)
-Withstanding Voltage: 1000VAC(1Min)
-Contact resistance: 16mΩ(Max).
-Operation Temperature: -40℃ to +120℃
Material:
-Insulator (Housing): PBT (UL94V-0)
-Color: Black
-Insulator(Retainer):PBT (UL94V-0)
-Color: Blue

Ordering Information

SCT2035H - 2xx D BK 173
No.of Pins See Table Insulation D=PBT Color BK=Black

PIN	Dimensions	
	A	B
8(2x04)	10.00	6.00
12(2x06)	14.00	10.00
16(2x08)	18.00	14.00
20(2x10)	22.00	18.00
24(2x12)	26.00	22.00

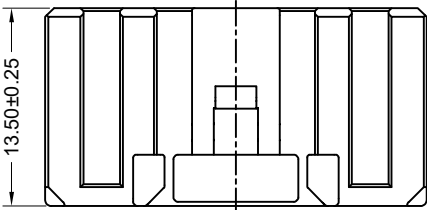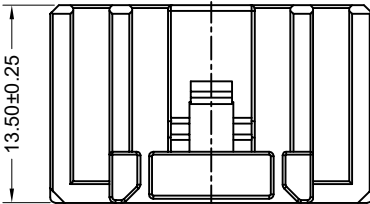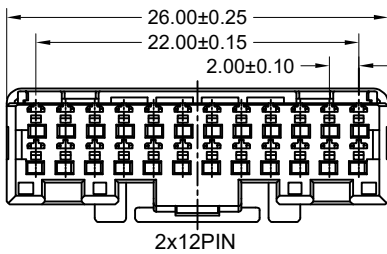

					OPERATION		DRAW	Yao	2020.09.16	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
		SCONDAR ELECTRONIC, LTD ENGINEER			X.X	±0.30	DESIGN	Yao	2020.09.16	UNIT	mm		
			X.XX	±0.20	CHECK	Xiong	2020.09.16	SIZE	A4				
A0	2016.06.06		NEW	—	—	X.XXX	±0.10	SHEET	1/1	Part No	SCT2035H-2xxDBK173		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	APPROVE	Lisa	2020.09.17	PROJ.		TITLE:	CPT 2.00mm PBT V0 Black 2xxPin Housing
					DIM	TOL							