






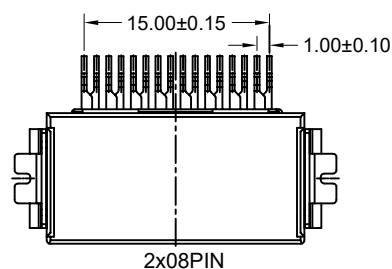



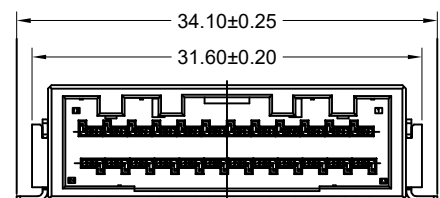
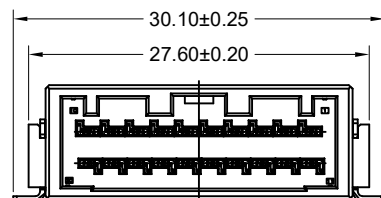


RoHS

受控

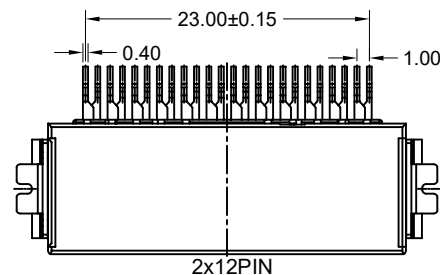

PCB Layout

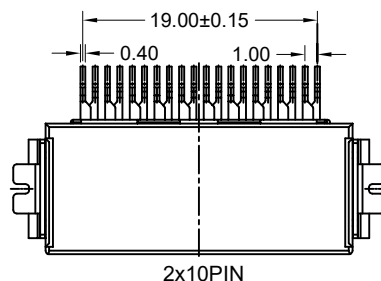

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ(Min)
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 16mΩ(Max).
- Operation Temperature: -40℃ to +120℃

Material:

- Wafer: LCP UL94-V0
- Color: Black
- PIN: Copper Alloy/Tin Plated or Gold Plated
- Solder: Brass/Tin Plated

Ordering Information

SCT2035WRS - 2xx F 1 BK 173

No. of Pins
See Table
Insulation
F=LCP V0
Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray
Color
BK=Black

PIN	Dimensions	
	A	B
8(2x04)	19.80	7.00
12(2x06)	23.80	11.00
16(2x08)	27.80	15.00
20(2x10)	31.80	19.00
24(2x12)	35.80	23.00

SCONDAR ELECTRONIC, LTD
ENGINEER

OPERATION
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Yao
Xiong
Lisa

2020.09.16
2020.09.16
2020.09.16
2020.09.17

SCALE
UNIT
SIZE
SHEET
PROJ.

—
mm
A4
1/1
Part No

TITLE:

SCT2035WRS-2xxF1BK173

CPT 2.00mm LCP V0 Black 2xxPin SMT WR Socket Tape&Reel

SCONDAR ELECTRONIC LIMITED