
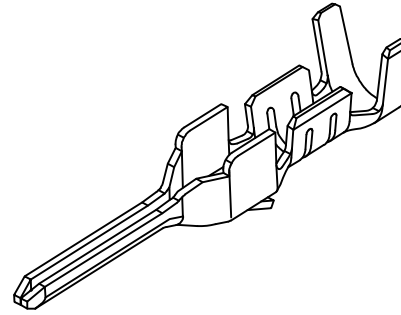


RoHS

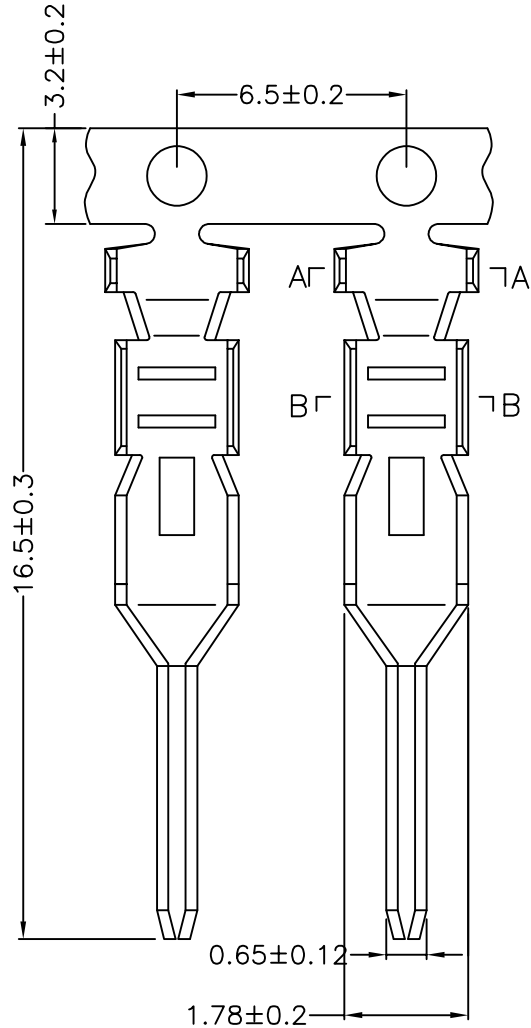


Specification:


- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Material: Phosphor Bronze T=0.20mm
- Finish: Tin Plated
- Applicable Wires: 22AWG~28AWG(OD1.1-1.8mm)



SEC:A-A



SEC:B-B

Ordering Information

SCT2501 MT P S 169

Material
P=Phosphor Bronze

Contact Plated
S=Tin Plated

SCONDAR ELECTRONIC, LTD
ENGINEER 20240806

OPERATION	
X.X	±0.35
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Xiong	2021.10.08
DESIGN		
CHECK	Lisa	2021.10.10
APPROVE		

SCALE	—
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	☞



SCONDAR ELECTRONIC LIMITED

A0	2021.10.08	NEW
----	------------	-----

REV	DATE	MODIFICATION DESCRIPTION
-----	------	--------------------------

CHANGE	APPROVE
--------	---------

APPROVE

PART NO.

SCT2501MTPS169

TITLE:

XH2.50mm phosphor Bronze Tin-plated Male Terminal 22~28AWG MPQ=8KPCS/Reel
