

RoHS

授控






2-5P, without slot  
6P-15P, with slot

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nyion 66 (UL94V-0)
- Color: White

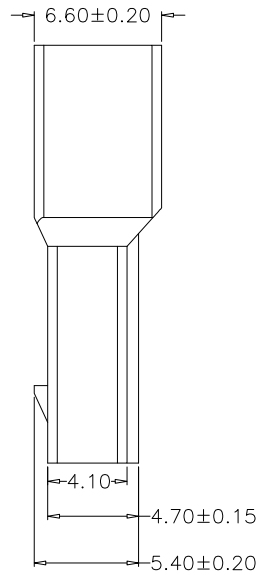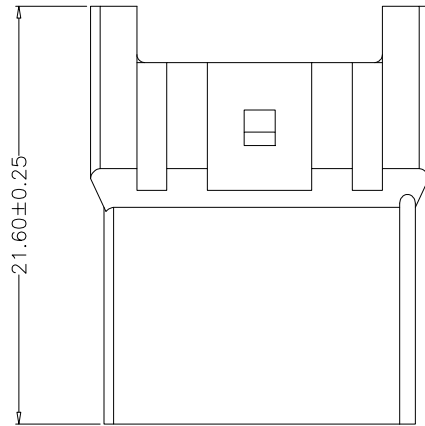

Ordering Information

SCT2518FH - xx B 0 WT 182

No. of Pins See Table  
Insulation B=PA66 V0  
Package 0=PE Bag  
Color WT=White

Dimensions		Part NO	PIN
A	B		
2.50	7.50	SCT2518FH-02BOWT182	2
5.00	10.00	SCT2518FH-03BOWT182	3
7.50	12.50	SCT2518FH-04BOWT182	4
10.00	15.00	SCT2518FH-05BOWT182	5
12.50	17.50	SCT2518FH-06BOWT182	6
15.00	20.00	SCT2518FH-07BOWT182	7
17.50	22.50	SCT2518FH-08BOWT182	8
20.00	25.00	SCT2518FH-09BOWT182	9
22.50	27.50	SCT2518FH-10BOWT182	10
25.00	30.00	SCT2518FH-11BOWT182	11
27.50	32.50	SCT2518FH-12BOWT182	12
30.00	35.00	SCT2518FH-13BOWT182	13
32.50	37.50	SCT2518FH-14BOWT182	14
35.00	40.00	SCT2518FH-15BOWT182	15

SCONDAR ELECTRONIC LIMITED  
ENGINEER LIU APPROVED

					OPERATION	DRAW	Zhong	2016.07.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.30	DESIGN			UNIT	mm	
					X.XX ±0.20		CHECK	Lisa	2016.07.06	SIZE	
A0	2016.07.06	NEW			X.XXX ±0.10	APPROVE			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.	⊕	TITLE: XA2.5mm PA66 V0 XXPin WT Female Housing Bag MPQ=1K/bag
					DIM TOL						