RoHS

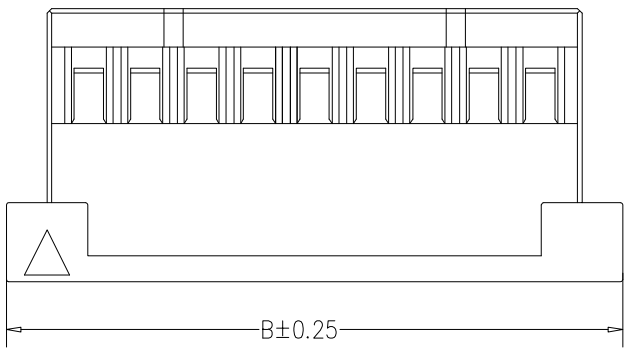

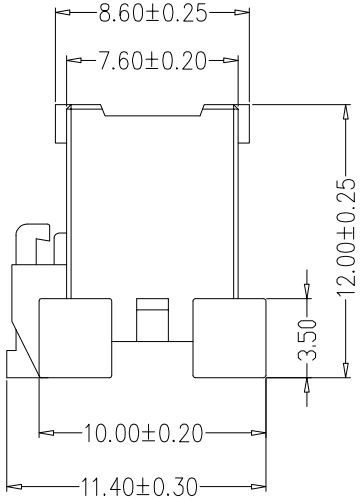

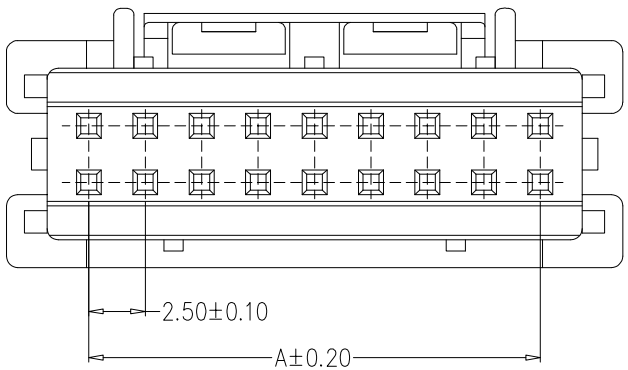

Specification:
-Current Rating: 3A AC/DC
-Voitage Rating: 250V AC/DC
-Insulation Resistance: 1000MΩ Min
-Withstanding Voltage: 1000VAC(1Min)
-Contact resistance: 20mΩ(Max).
-Operation Temperature: -25℃ to +85℃
Material:
-Insulator (Housing): Nyion 66 (UL94V-0)
-Color: White

Ordering Information

SCT2518MH - 2xx B 0 WT 182

- 2xx: No.of Pins See Table
- B: Insulation B=PA66 V0
- 0: Package 0=PE Bag
- WT: Color WT=White

Dimensions		Part NO	PIN
A	B		
7.50	15.00	SCT2518MH-204B0WT182	2*4
10.00	17.50	SCT2518MH-205B0WT182	2*5
12.50	20.00	SCT2518MH-206B0WT182	2*6
15.00	22.50	SCT2518MH-207B0WT182	2*7
17.50	25.00	SCT2518MH-208B0WT182	2*8
20.00	27.50	SCT2518MH-209B0WT182	2*9
22.50	30.00	SCT2518MH-210B0WT182	2*10
25.00	32.50	SCT2518MH-211B0WT182	2*11
27.50	35.00	SCT2518MH-212B0WT182	2*12
30.00	37.50	SCT2518MH-213B0WT182	2*13
32.50	40.00	SCT2518MH-214B0WT182	2*14
47.50	55.00	SCT2518MH-220B0WT182	2*20

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0		NEW	———	———

OPERATION				
X.X	±0.30	DRAW	Zhong	2020.07.06
X.XX	±0.20	DESIGN		
X.XXX	±0.10	CHECK	Lisa	2020.07.06
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	——
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR ELECTRONIC LIMITED

Part No.	SCT2518MH-2xxB0WT182
TITLE:	XA2.5mm PA66 V0 2XXPin WT Double row Male Housing Bag MPQ=1K/bag