
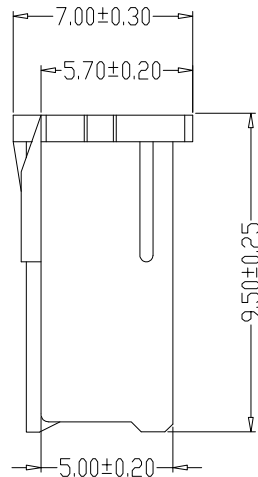


RoHS

授控

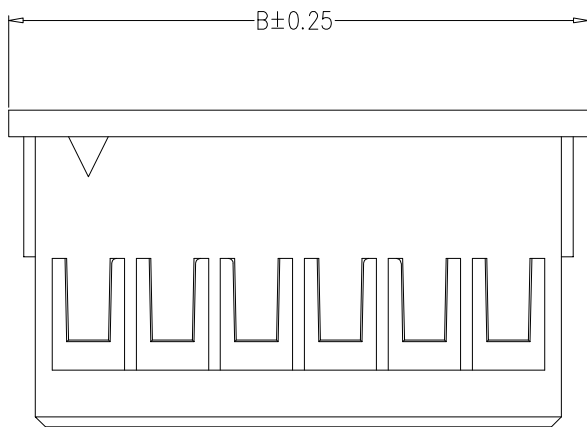

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C


Material:

- Insulator (Housing): Nyion 66 (UL94V-0)
- Color: White

Ordering Information

SCT2518MH - xx B 0 WT 182

No. of Pins See Table
 Insulation B=PA66 V0
 Package 0=PE Bag
 Color WT=White

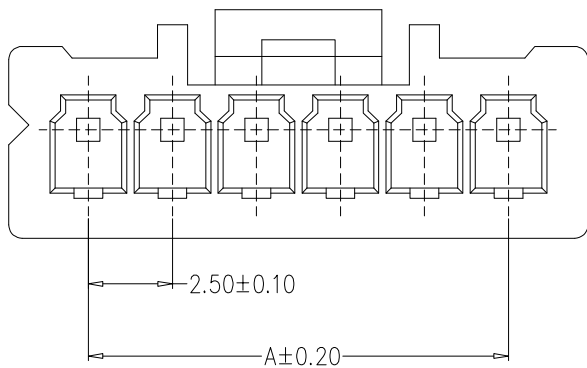

SCONDAR ELECTRONIC LIMITED
 ENGINEER LIU APPROVED

Dimensions		Part NO	PIN
A	B		
2.50	7.20	SCT2518MH-02BOWT182	2
5.00	9.70	SCT2518MH-03BOWT182	3
7.50	12.20	SCT2518MH-04BOWT182	4
10.00	14.70	SCT2518MH-05BOWT182	5
12.50	17.20	SCT2518MH-06BOWT182	6
15.00	19.70	SCT2518MH-07BOWT182	7
17.50	22.20	SCT2518MH-08BOWT182	8
20.00	24.70	SCT2518MH-09BOWT182	9
22.50	27.20	SCT2518MH-10BOWT182	10
25.00	29.70	SCT2518MH-11BOWT182	11
27.50	32.20	SCT2518MH-12BOWT182	12
30.00	34.70	SCT2518MH-13BOWT182	13
32.50	37.20	SCT2518MH-14BOWT182	14
35.00	39.70	SCT2518MH-15BOWT182	15
37.50	42.20	SCT2518MH-16BOWT182	16

					OPERATION	DRAW	Zhong	2016.07.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.30	DESIGN			UNIT	mm		
					X.XX ±0.20				SIZE	A4		
A0		NEW			X.XXX ±0.10	CHECK	Lisa	2016.07.06	SHEET	1/1		Part No.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	⌀	TITLE:	XA2.5mm PA66 V0 XXPIN WT Male Housing Bag MPQ=1K/bag
					DIM TOL							