


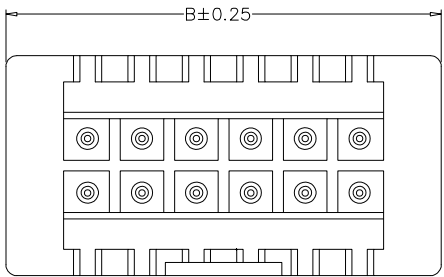


RoHS


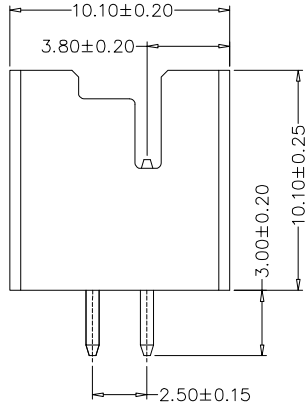


Specification:
 -Current Rating: 3A AC/DC
 -Voltage Rating: 250V AC/DC
 -Insulation Resistance: 1000MΩ Min
 -Withstanding Voltage: 1000VAC(1Min)
 -Contact resistance: 10mΩ (Max).
 -Operation Temperature: -25 °C to +85 C
 Material:
 -Insulator (Housing): PA46 (UL94V-0)
 -Color: Beige
 -Contacts: Brass/Tin Plated

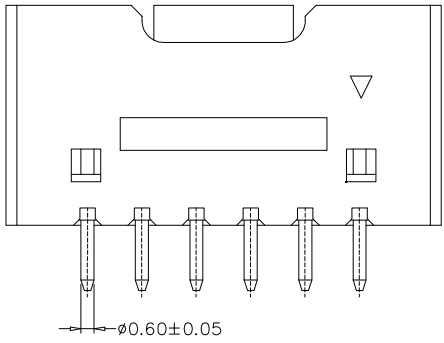

Ordering Information
SCT2518WV - 2xx G 0 BE 182

No. of Pins See Table
 Insulation G=PA46 V0
 Package 0=PE Bag
 Color BE=White

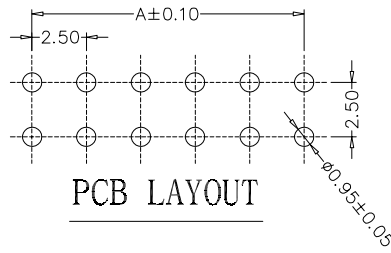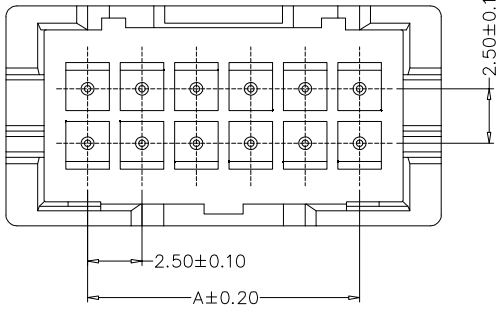

Dimensions		Part NO	PIN
A	B		
2.50	7.50	SCT2518WV-202GOBE182	2*2
5.00	10.00	SCT2518WV-203GOBE182	2*3
7.50	12.50	SCT2518WV-204GOBE182	2*4
10.00	15.00	SCT2518WV-205GOBE182	2*5
12.50	17.50	SCT2518WV-206GOBE182	2*6
15.00	20.00	SCT2518WV-207GOBE182	2*7
17.50	22.50	SCT2518WV-208GOBE182	2*8
20.00	25.00	SCT2518WV-209GOBE182	2*9
22.50	27.50	SCT2518WV-210GOBE182	2*10
25.00	30.00	SCT2518WV-211GOBE182	2*11
27.50	32.50	SCT2518WV-212GOBE182	2*12
30.00	35.00	SCT2518WV-213GOBE182	2*13
32.50	37.50	SCT2518WV-214GOBE182	2*14
47.50	52.50	SCT2518WV-220GOBE182	2*20

SCONDAR ELECTRONIC LIMITED
 ENGINEER LIU APPROVED

OPERATION	DRAW	Zhong	2020.08.12	SCALE	—
X.X ±0.30	DESIGN			UNIT	mm
X.XX ±0.20				SIZE	A4
X.XXX ±0.10	CHECK	Lisa	2020.08.12	SHEET	1/1
Angle ±3°	APPROVE			PROJ.	◆
DIM TOL				TITLE:	

SCONDAR
 SCONDAR ELECTRONIC LIMITED
 Part No. SCT2518WV-2xxGOBE182
 XAZ.5mm DIP WV PA46 V0 2XXPin Double row BE Male Socket Bag

A0	NEW			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE