
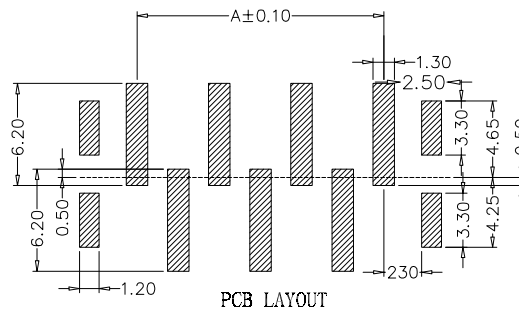
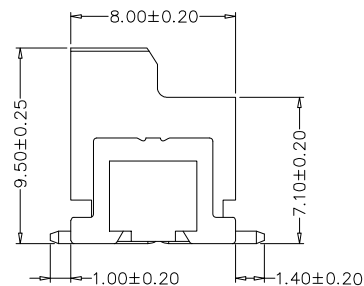

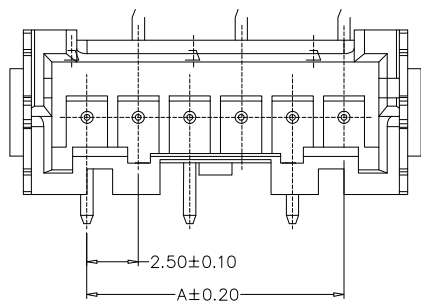
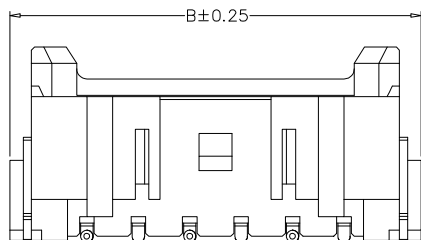


RoHS

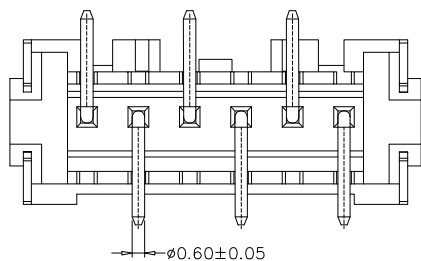

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA6T (UL94V-0)
- Color: Beige
- Contacts: Brass/Tin Plated
- Solder: Phosphor Bronze/Tin Plated

Ordering Information

SCT2518WVS - xx A 1 BE 182

No. of Pins
See Table

Insulation
A=PA6T

Package
1=Tape&Reel

Color
BE=Beige

SCONDAR ELECTRONIC LIMITED
ENGINEER LIU APPROVED

Dimensions		Part NO	PIN
A	B		
2.50	10.00	SCT2518WVS-02A1BE182	2
5.00	12.50	SCT2518WVS-03A1BE182	3
7.50	15.00	SCT2518WVS-04A1BE182	4
10.00	17.50	SCT2518WVS-05A1BE182	5
12.50	20.00	SCT2518WVS-06A1BE182	6
15.00	22.50	SCT2518WVS-07A1BE182	7
17.50	25.00	SCT2518WVS-08A1BE182	8
20.00	27.50	SCT2518WVS-09A1BE182	9
22.50	30.00	SCT2518WVS-10A1BE182	10
25.00	32.50	SCT2518WVS-11A1BE182	11
27.50	35.00	SCT2518WVS-12A1BE182	12
35.00	42.50	SCT2518WVS-15A1BE182	15

					OPERATION	DRAW	Zhong	2020. 11. 06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X. X	±0.30			UNIT	mm		
					X. XX	±0.20			SIZE	A4		
					X. XXX	±0.10			SHEET	1/1		
A0			NEW		Angle	±3°	CHECK	Lisa	2020. 11. 06	Part No.	SCT2518WVS-xxA1BE182	
REV	DATE	MODIFICATION DESCRIPTION			DIM	TOL	APPROVE		PROJ.	◆	TITLE:	
											XA2.5mm PA6T V0 SMT WV BE Socket tape and reel package	