



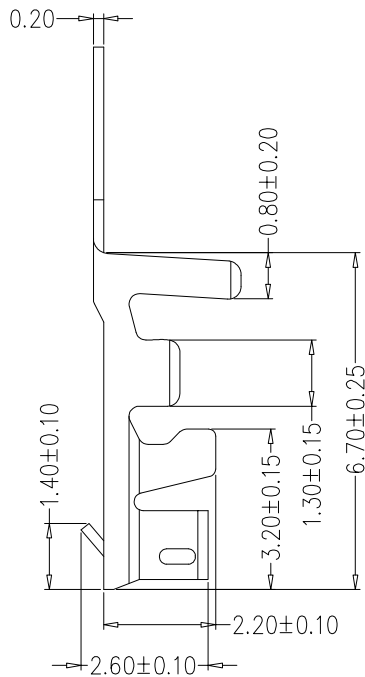


RoHS

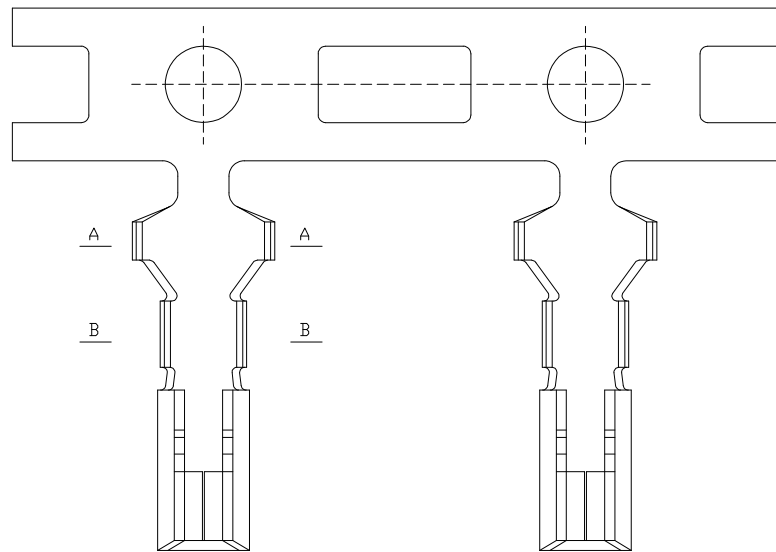

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ (Min)
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ (Max).
- Operation Temperature: -25°C to +85°C

Material:

- Material: Phosphor Bronze
- Finish: Tin Plated
- Applicable Wires: 22AWG~28AWG

Ordering Information

SCT2518FT P S 182

Material:  
P=Phosphor Bronze

Contact Plated  
S=Tin Plated

SCONDAR ELECTRONIC LIMITED  
ENGINEER LIU APPROVED

					OPERATION	DRAW	Zhong	2020. 07. 06	SCALE	—		
					X. X ±0.30	DESIGN			UNIT	mm		
					X. XX ±0.20				SIZE	A4		
A0		NEW			X. XXX ±0.10	CHECK	Lisa	2020. 07. 06	SHEET	1/1	Part No	SCT2518FTPS182
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	◆	TITLE:	2.50mm Pitch for SCT2518MH Crimp Terminal
					DIM TOL							