




RoHS

受控

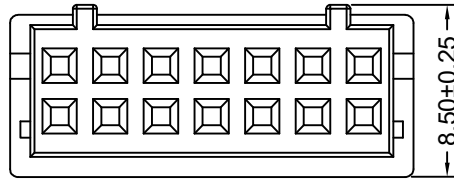

2*2P(4P)



2*3P(6P)

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing): PA66(UL94V-0)
- Color: White





Ordering Information

SCT2523H - 2xx B WT 169

No. of Pins
See Table

Insulation
B=PA66 V0

Color
WT=White

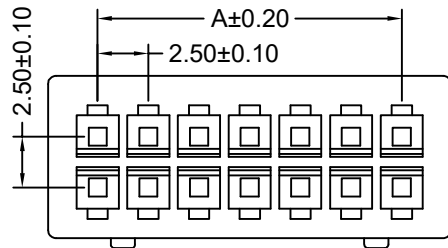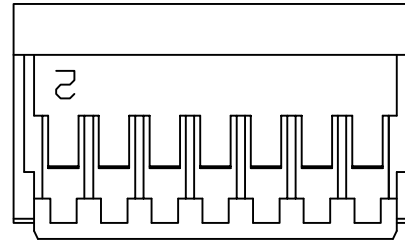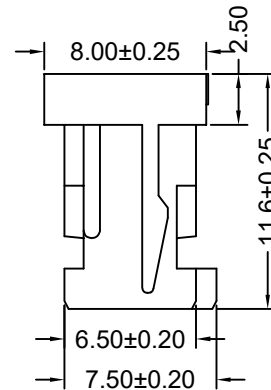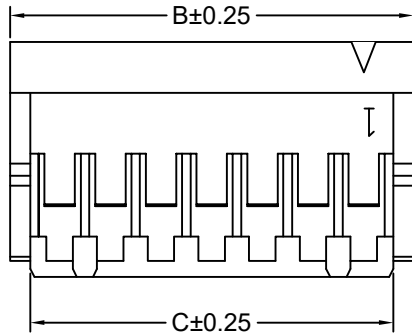

Poles	Dimensions			Poles	Dimensions		
	A	B	C		A	B	C
2x02	2.50	7.40	5.40	2x12	27.50	32.40	30.40
2x03	5.00	9.90	7.90	2x13	30.00	34.90	32.90
2x04	7.50	12.40	10.40	2x14	32.50	37.40	35.40
2x05	10.00	14.90	12.90	2x15	35.00	39.90	37.90
2x06	12.50	17.40	15.40	2x16	37.50	42.40	40.40
2x07	15.00	19.90	17.90	2x17	40.00	44.90	42.90
2x08	17.50	22.40	20.40	2x18	42.50	47.40	45.40
2x09	20.00	24.90	22.90	2x19	45.00	49.90	47.90
2x10	22.50	27.40	25.40	2x20	47.50	52.40	50.40
2x11	25.00	29.90	27.90				

SCONDAR ELECTRONIC, LTD
ENGINEER 2505

OPERATION
X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
Angle ± 3°
DIM TOL

DRAW
DESIGN
CHECK
APPROVE

Yao
Xiong
Lisa

2021.10.08
2021.10.08
2021.10.10

SCALE
UNIT
SIZE
SHEET
PROJ.

-
mm
A4
1/1
⌀

SCONDAR

SCONDAR ELECTRONIC LIMITED

PART NO.

SCT2523H-2xxBWT169

TITLE:

XHD 2.50mm PA66 V0 White 2xxPin Housing

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	2021.10.08	NEW		