


受控

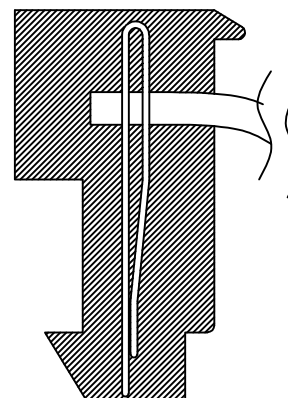

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -40℃ to +105℃

Material:

- Insulator (Housing): PA66 (UL94V-2)
- Color: Red(22#) ;White(24#);Blue(26#);Green(28#)
- Terminal: Phosphor Bronze/ Tin Plated

SCT2548HIR A - xx C xx 180

A TYPE No. of Pins Insulation Color
See Table C=PA66 V2 RD=Red WT=White
BI=Blue GN=Green

Poles	Dimensions			Poles	Dimensions	
	A	B			A	B
2	2.54	5.08		14	33.02	35.56
3	5.08	7.62		15	35.56	38.10
4	7.62	10.16		16	38.10	40.64
5	10.16	12.70		17	40.64	43.18
6	12.70	15.24		18	43.18	45.72
7	15.24	17.78		19	45.72	48.26
8	17.78	20.32		20	48.26	50.80
9	20.32	22.86		21	50.80	53.34
10	22.86	25.40		22	53.34	55.88
11	25.40	27.94		23	55.88	58.42
12	27.94	30.48		24	58.42	60.96
13	30.48	33.02				

C	Color	Wire size
RD	Red	22AWG
WT	White	24AWG
BL	Blue	26AWG
GN	Green	28AWG

					OPERATION		DRAW	Yao	2021.07.07	SCALE	—	 SCONДАР ELECTRONIC LIMITED	
		SCONДАР ELECTRONIC, LTD			XX	±0.35	DESIGN	Xiong	2021.07.07	UNIT	mm		
		ENGINEER 2504			XX.XX	±0.25				SIZE	A4		
A0	2021.07.07	NEW	—	—	XXX	±0.15	CHECK	Lisa	2021.07.07	SHEET	1/1	PART NO.	SCT2548HIRA-xxCxx180
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE			PROJ.		TITLE:	AMP640440 2.54mm PA66 V2 xxPin 90° IDC xx(AWG) Phosphor Bronze Tin Plated Housing A Type
					DIM	TOL							