

RoHS


受控

Specification:

-Operation Temperature: -25℃ to +85℃

-Insulator (Housing): PA66 (UL94V-2)

-Color: White

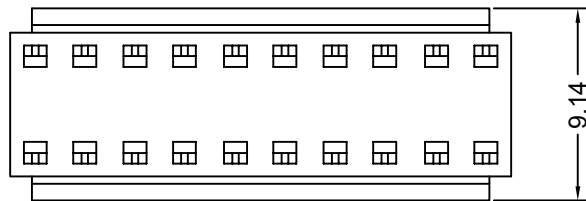



Ordering Information

SCT2548HSV - xx C WT 180

No. of Pins
See Table

Insulation
C=PA66 V2

Color
WT=White

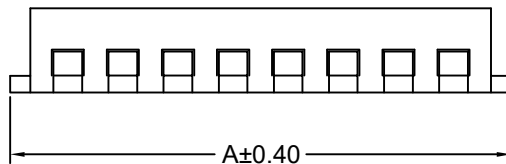

Poles	Dimensions	Poles	Dimensions
	A		A
2	5.08	14	35.56
3	7.62	15	38.10
4	10.16	16	40.64
5	12.70	17	43.18
6	15.24	18	45.72
7	17.78	19	48.26
8	20.32	20	50.80
9	22.86	21	53.34
10	25.40	22	55.88
11	27.94	23	58.42
12	30.48	24	60.96
13	33.02		

SCONDAR ELECTRONIC, LTD
ENGINEER 2504

SCONDAR

SCONDAR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	Yao	2021.07.07	SCALE	—	UNIT	mm	SIZE	A4	SHEET	1/1	PART NO.	SCT2548HSV-xxCWT180
					X.X	±0.35													
					X.XX	±0.25													
					X.XXX	±0.15													
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE					PROJ.	TITLE:						
					DIM	TOL													

AMP640440 2.54mm PA66 V2 xxPin 180° IDC Housing
White Clasp