


RoHS

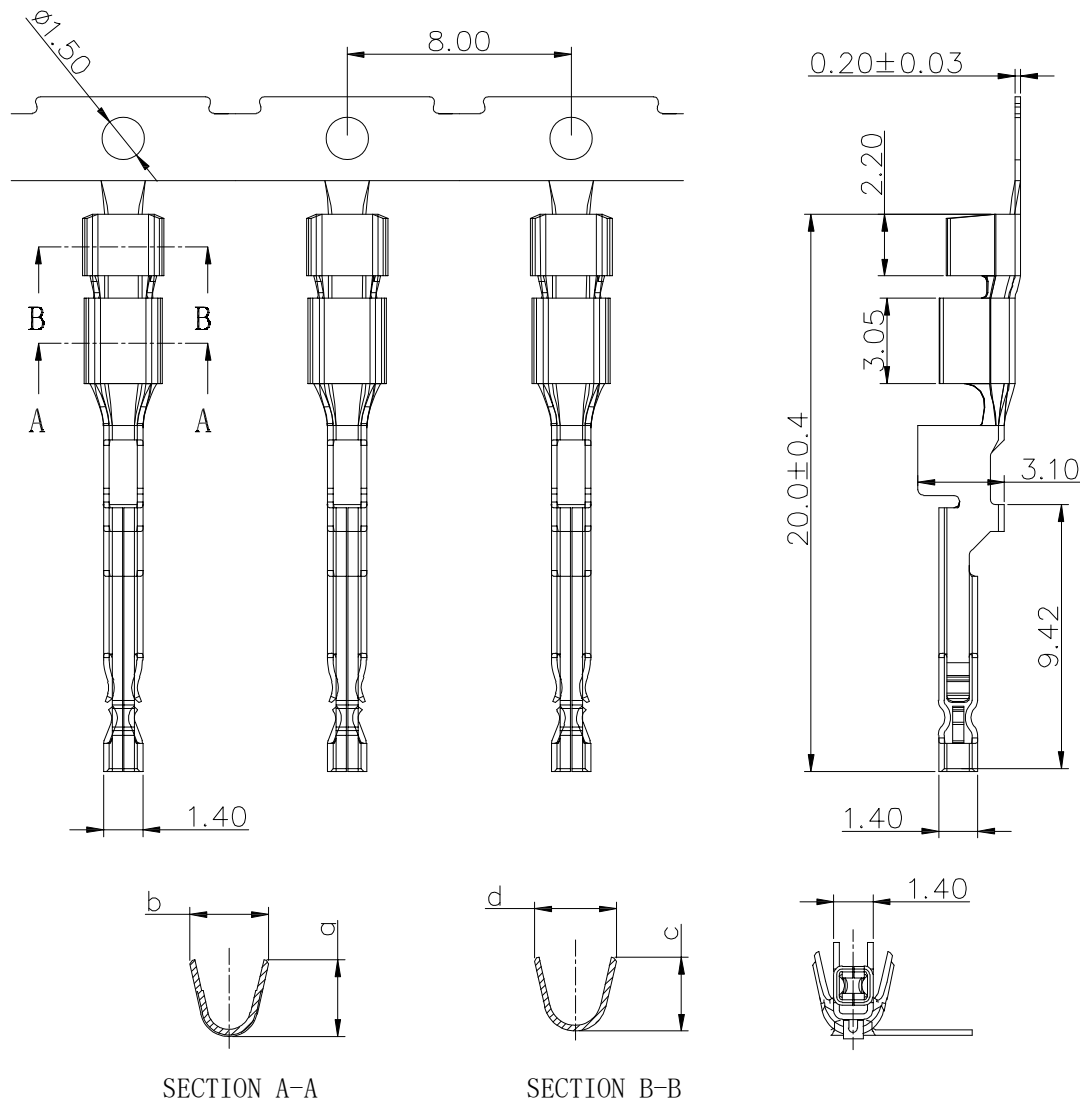

Specification:

- Current Rating: 14A AC/DC
- Voltage Rating: 400V AC/DC
- Insulation Resistance: 100M Ω Min
- Withstanding Voltage: 1800VAC(1Min)
- Contact resistance: 10m Ω (Max).
- Operation Temperature: -40℃ to +105℃

Material:

- Applicable Wire: AWG#16-#22
- Material: High conductivity copper T=0.20mm
- Finish: Tin Plated

东莞市晟凯达电子科技有限公司
工程专用章

Ordering Information

SCT3501Tx K S 173

Material
High conductivity copper

Contact Plated
S=Tin plated

受控

Part NO	Wire range	DIM A	DIM B	DIM C	DIM D
SCT3501TLKS173	#20~#22	2.20	2.80	2.10	2.65
SCT3501TAKS173	#18~#18	2.80	2.50	2.63	2.65

					OPERATION	DRAW	ZUO	2017.07.8	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X. X ± 0.30	DESIGN			UNIT	mm		
					X. XX ± 0.20	CHECK	Lisa	2017.07.8	SIZE	A4		
					X. XXX ± 0.10	APPROVE			SHEET	1/1	Part No	SCT3501TxKS173
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle $\pm 3^\circ$	APPROVE			PROJ.		TITLE:	3.50mm Pitch for SCT3501H Crimp Terminal High conductivity copper Tin(Sn) Plating 16-22AWG Reel MPQ=6KPCS
					DIM TOL							