
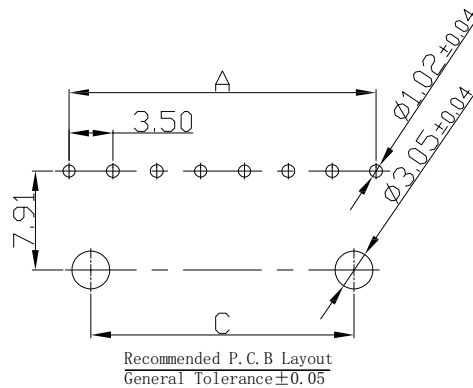


RoHS

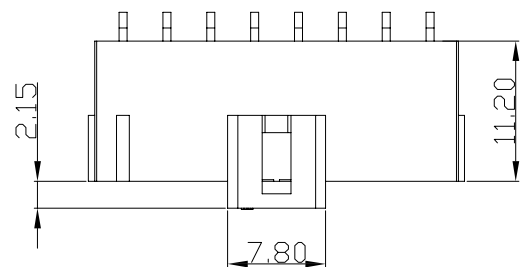





Specification:
-Current Rating: 14A AC/DC
-Voitage Rating: 400V AC/DC
-Insulation Resistance: 100M Ω Min
-Withstanding Voltage: 1800VAC(1Min)
-Contact resistance: 10m Ω (Max).
-Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
Material:
-Insulator (Housing): LCP (UL94V-0)
-Color: Black/Natural
-Material:Brass
-Finish: Tin Plated

东莞市晟凯达电子科技有限公司
工程专用章


Ordering Information

SCT3501WRF xx - xx F 3 BK 173
PROTRUSIONS KA=KEY A KB=KEY B No.of Pins See Table Insulation F=LCP V0 Package 3=Tray Color BK=Black NA=Natural



受控

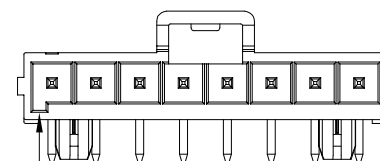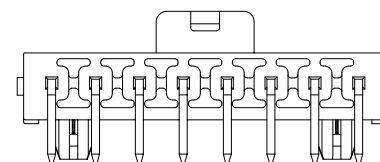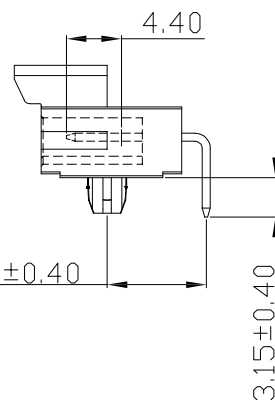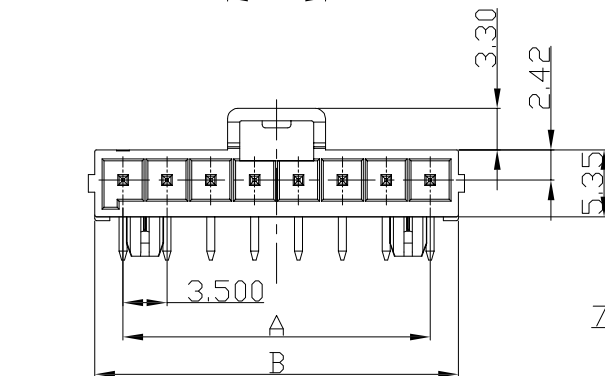

KEY A

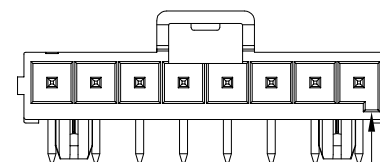

KEY B

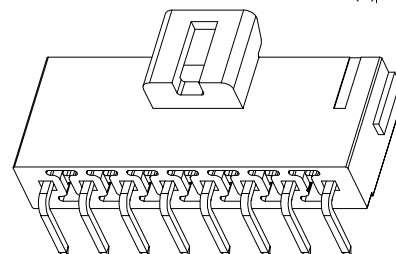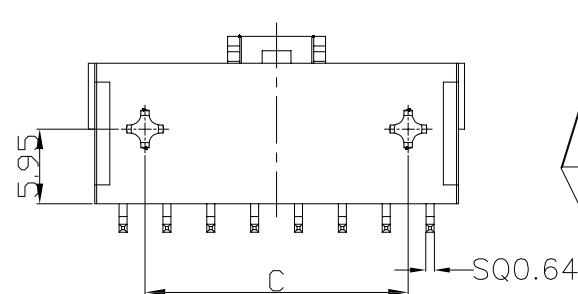

Dimensions			Part NO	PIN
A	B	C		
3.50	8.00	/	SCT3501WRFxx-02F3BK173	2
7.00	11.50	/	SCT3501WRFxx-03F3BK173	3
10.50	15.00	7.00	SCT3501WRFxx-04F3BK173	4
14.00	18.50	10.50	SCT3501WRFxx-05F3BK173	5
17.50	22.00	14.00	SCT3501WRFxx-06F3BK173	6
21.00	25.50	17.50	SCT3501WRFxx-07F3BK173	7
24.50	29.00	21.00	SCT3501WRFxx-08F3BK173	8

					OPERATION		DRAW	ZUO	2017. 07. 8	SCALE	—		SCONDAR ELECTRONIC LIMITED		
					X. X	± 0. 30				DESIGN	UNIT			mm	
					X. XX	± 0. 20	CHECK	SIZE	A4						
A0	2017. 07. 8	NEW			X. XXX	± 0. 10		APPROVE	LISA	2017. 07. 8	SHEET			1/1	Part NO.
					Angle	± 3°	DIM				TOL			PROJ.	