


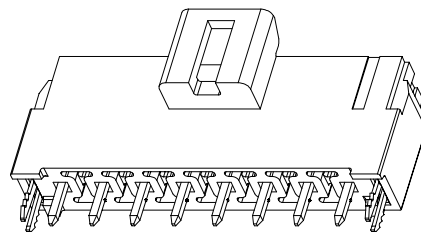
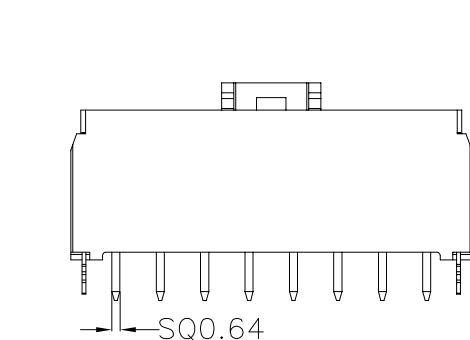
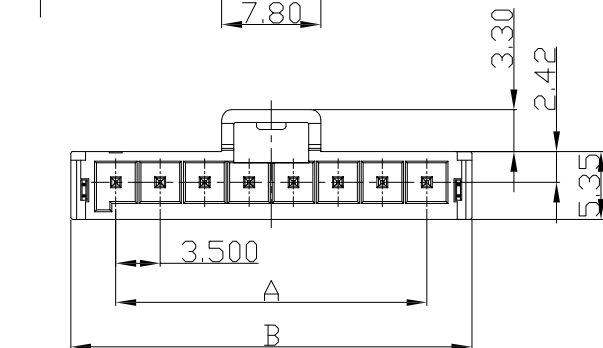


RoHS

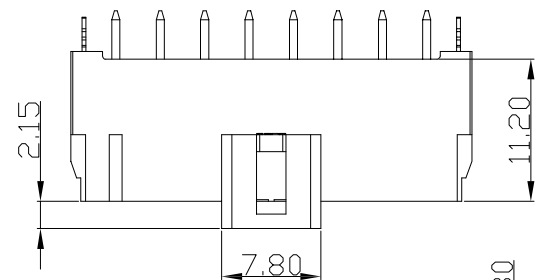

Recommended P.C.B Layout
General Tolerance ± 0.05

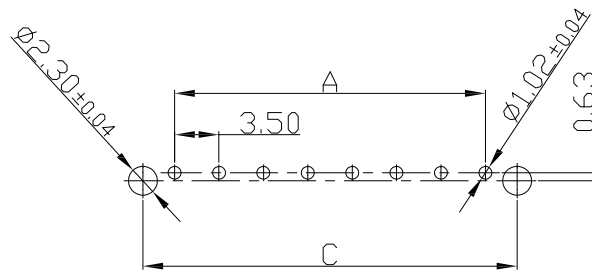

Specification:

- Current Rating: 14A AC/DC
- Voltage Rating: 400V AC/DC
- Insulation Resistance: 100M Ω Min
- Withstanding Voltage: 1800VAC(1Min)
- Contact resistance: 10m Ω (Max).
- Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
- Material:
 - Insulator (Housing): LCP (UL94V-0)
 - Color: Black/Natural
 - Material: Brass
 - Finish: Tin Plated

Ordering Information

SCT3501WV xx - xx F 3 BK 173

PROTRUSIONS
KA=KEY A
KB=KEY B

No. of Pins
See Table

Insulation
F=LCP V0

Package
3=Tray


Color
BK=Black
NA=Natural

东莞市晟凯达电子科技有限公司
工程专用章

受控

Dimensions			Part NO	PIN
A	B	C		
3.50	10.60	8.50	SCT3501WVxx-02F3BK173	2
7.00	14.10	12.00	SCT3501WVxx-03F3BK173	3
10.50	17.60	15.50	SCT3501WVxx-04F3BK173	4
14.00	21.10	19.00	SCT3501WVxx-05F3BK173	5
17.50	24.60	22.50	SCT3501WVxx-06F3BK173	6
21.00	28.10	26.00	SCT3501WVxx-07F3BK173	7
24.50	31.60	29.50	SCT3501WVxx-08F3BK173	8

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	ZUO	2017.07.8	SCALE	—	SHEET	1/1	Part NO.	SCT3501WVxx-xxF3BK173	TITLE:	3.50mm Pitch DIP Single Row Vertical Through Hole PCB Header xxPin LCP V0 Black Tin(Sn) Plating Tray 3.20mm PC Tail Length MPQ=1KPCS
					X.X	± 0.30											
A0	2017.07.8	NEW	—	—	X.XX	± 0.20	DESIGN					UNIT	mm				
					X.XXX	± 0.10	CHECK	ZHONG	2017.07.8			SIZE	A4				
					Angle	$\pm 3^{\circ}$	APPROVE	Lisa	2017.07.8			PROJ.					
					DIM	TOL											



SCONDAR ELECTRONIC LIMITED