
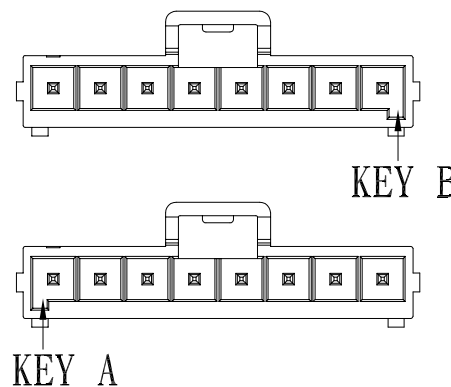
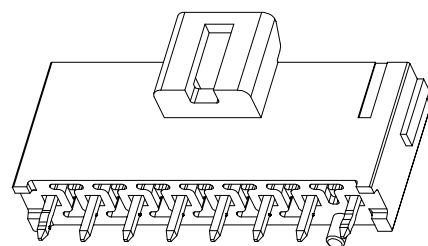
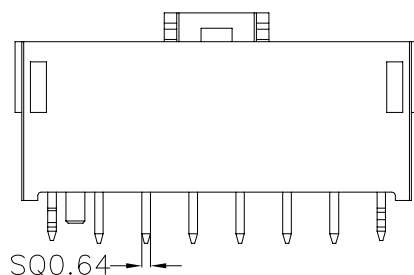
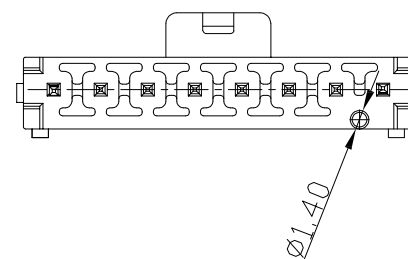

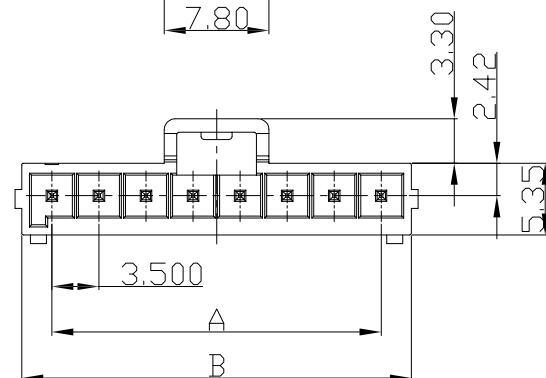
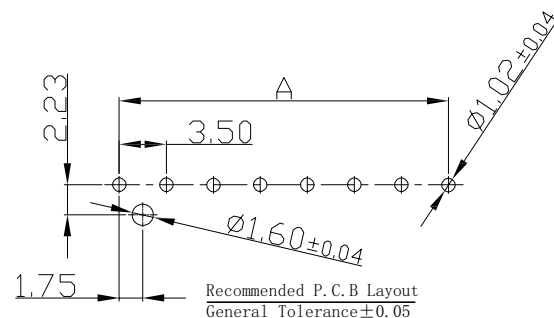


RoHS

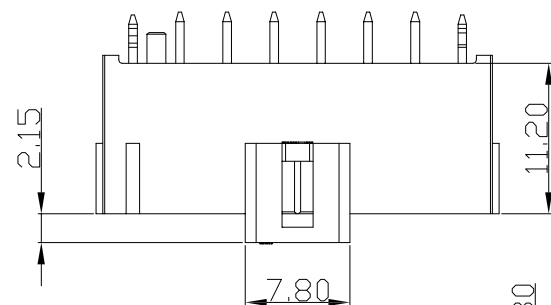

Specification:

- Current Rating: 14A AC/DC
- Voltage Rating: 400V AC/DC
- Insulation Resistance: 100M Ω Min
- Withstanding Voltage: 1800VAC(1Min)
- Contact resistance: 10m Ω (Max).
- Operation Temperature: -40℃ to +105℃

Material:

- Insulator (Housing): LCP (UL94V-0)
- Color: Black/Natural
- Material: Brass
- Finish: Tin Plated

Ordering Information

SCT3501WVIK xx - xx F 3 BK 173

PROTRUSIONS KA=KEY A KB=KEY B No.of Pins Sec Table Insulation F=LCP V0 Package 3=Tray Color BK=Black NA=Natural

东莞市晟凯达电子科技有限公司
工程专用章

受控

Dimensions		Part NO	PIN
A	B		
3.50	8.00	SCT3501WVIKxx-02F3BK173	2
7.00	11.50	SCT3501WVIKxx-03F3BK173	3
10.50	15.00	SCT3501WVIKxx-04F3BK173	4
14.00	18.50	SCT3501WVIKxx-05F3BK173	5
17.50	22.00	SCT3501WVIKxx-06F3BK173	6
21.00	25.50	SCT3501WVIKxx-07F3BK173	7
24.50	29.00	SCT3501WVIKxx-08F3BK173	8

		SCONDAR ELECTRONIC LIMITED	
Part NO.	SCT3501WVIXx-xxF3BK173		
TITLE:	3.50mm Pitch DIP Single Row Vertical Through Hole PCB Header xxPin LCP VO Black Tin(Sn) Plating Tray 3.20mm PC Tail Length MPQ-1Kpcs		

					OPERATION		DRAW	ZUO	2017.07.8
					X. X	±0.30	DESIGN		
					X. XX	±0.20			
A0	2017.07.8	NEW	_____	_____	X. XXX	±0.10	CHECK	ZHONG	2017.07.8
					Angle	±3°	APPROVE	Lisa	2017.07.8
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL			