

RoHS

Specification:

- Current Rating: 7.5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000M Ω Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20m Ω (Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA66 (UL94V-0)
- PIN: Brass/Tin-plated
- Color: White

Ordering Information

SCT3961WV - xx B 0 WT 190


No. of Pins
See Table

Insulation
B=PA66 V0

0=PE Bag

Color
WT=White

Poles	Dimensions	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

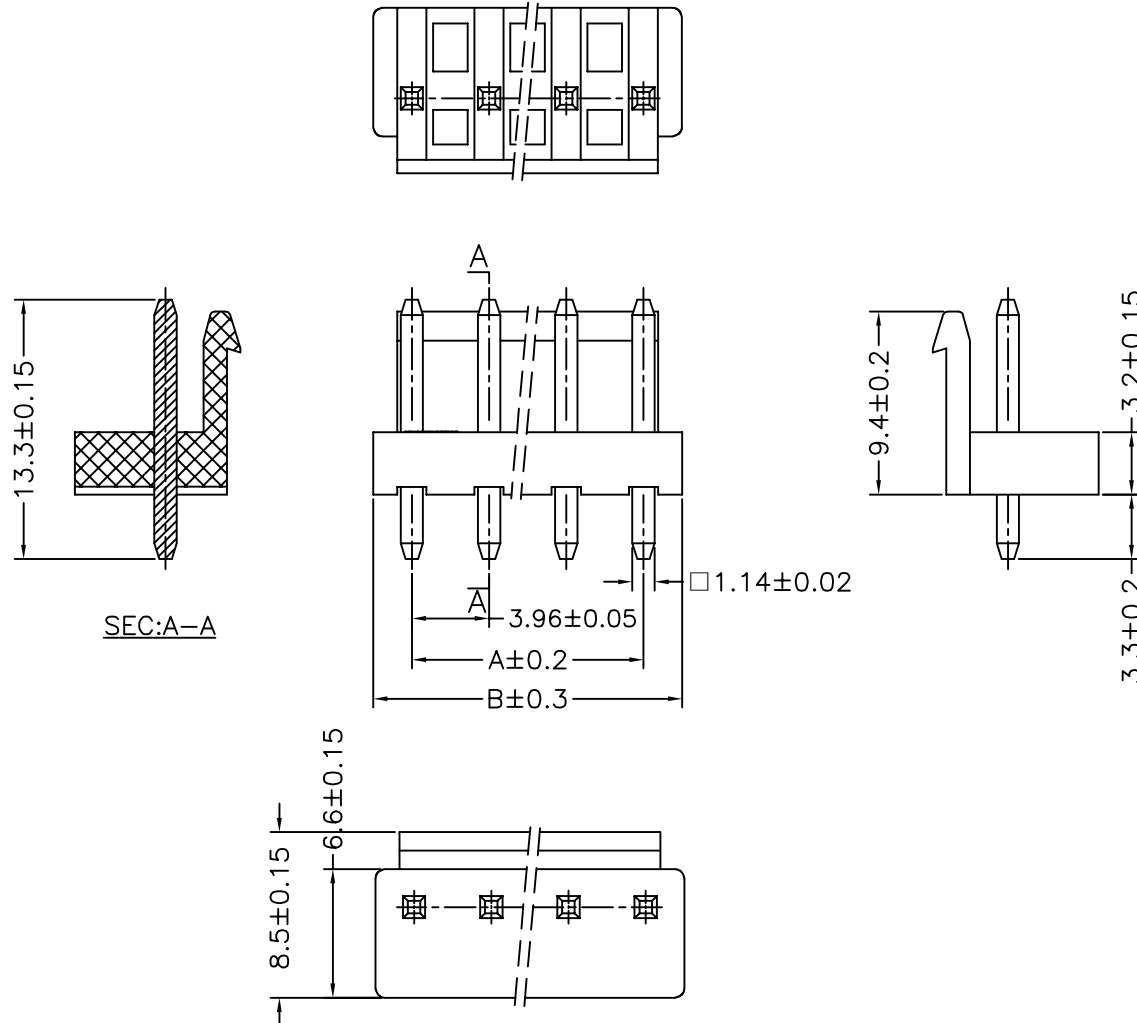

SCONDAR ELECTRONIC, LTD
ENGINEER 20240729

OPERATION	
X.X	±0.35
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Xiong	2022.07.06
DESIGN		
CHECK	Lisa	2022.07.08
APPROVE		

SCALE	—
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	☞



SCONDAR ELECTRONIC LIMITED

A0	2022.07.06	NEW
REV	DATE	MODIFICATION DESCRIPTION

CHANGE	APPROVE
--------	---------

CHANGE	APPROVE
--------	---------

PART NO.	SCT3961WV—xxBOWT190
TITLE:	VH 3.96mm PA66 V0 White xxPin Brass Tin-plated DIP WV Sokcet MPQ=1000PCS/Bag