

RoHS

受控



Specification:
 -Current Rating: 7A AC/DC
 -Voltage Rating: 250V AC/DC
 -Insulation Resistance: 1000MΩ Min
 -Withstanding Voltage: 1500VAC(1Min)
 -Contact resistance: 10mΩ(Max).
 -Operation Temperature: -45°C to +105°C

Material:
 -Insulator (Housing): PA66 (UL94V-2)
 -Color: White
 -Contacts:Brass/Tin Plated



Ordering Information

SCT3963WR - xx C 0 WT 180

No.of Pins See Table
 Insulation C=PA66 V2
 Package 0=PE Bag
 Color WT=White

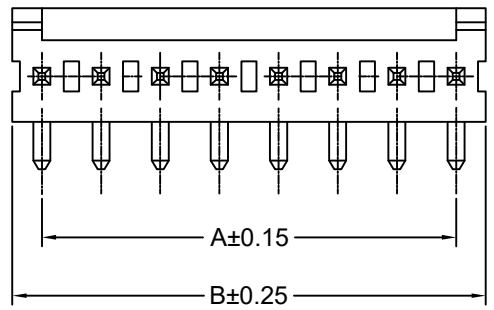

P.C.B. Hole Layout

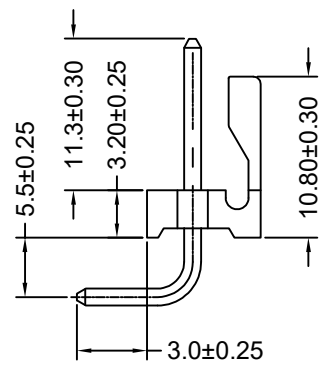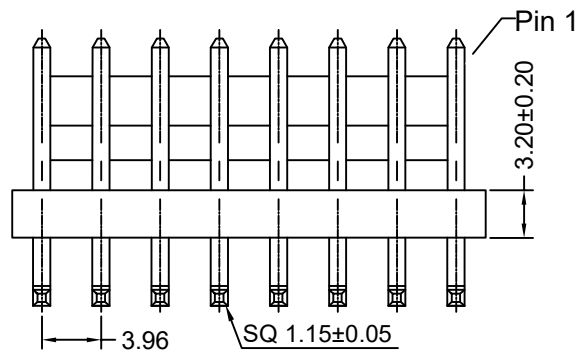

Dimensions		Part NO	PIN
A	B		
3.96	7.92	SCT3963WR-02C0WT180	2
7.92	11.88	SCT3963WR-03C0WT180	3
11.88	15.84	SCT3963WR-04C0WT180	4
15.84	19.80	SCT3963WR-05C0WT180	5
19.80	23.76	SCT3963WR-06C0WT180	6
23.76	27.72	SCT3963WR-07C0WT180	7
27.72	31.68	SCT3963WR-08C0WT180	8
31.68	35.64	SCT3963WR-09C0WT180	9
35.64	39.60	SCT3963WR-10C0WT180	10
39.60	43.56	SCT3963WR-11C0WT180	11
43.56	47.52	SCT3963WR-12C0WT180	12
47.52	51.48	SCT3963WR-13C0WT180	13
51.48	55.44	SCT3963WR-14C0WT180	14
55.44	59.40	SCT3963WR-15C0WT180	15
59.40	63.36	SCT3963WR-16C0WT180	16
63.36	67.32	SCT3963WR-17C0WT180	17
67.32	71.28	SCT3963WR-18C0WT180	18

						OPERATION	DRAW	Yao	2021.07.07	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
		SCONDAR ELECTRONIC, LTD ENGINEER 2504				X.X ±0.30	DESIGN	Xiong	2021.07.07	UNIT	mm		
						X.XX ±0.20	CHECK	Lisa	2021.07.08	SIZE	A4		
A0	2021.07.07		NEW			X.XXX ±0.10	APPROVE			SHEET	1/1		Part No.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	DIM	TOL	APPROVE		PROJ.		TITLE:	3.96mm PA66 V2 White xxPin Brass Tin Plated Short backrest DIP WR Sokcet MPQ=1KPs/Bag