

RoHS

Specification:

- Current Rating: 5A AC/DC
- Voltage Rating: 300V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C

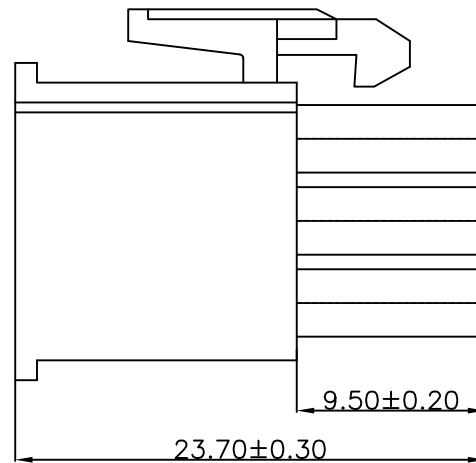
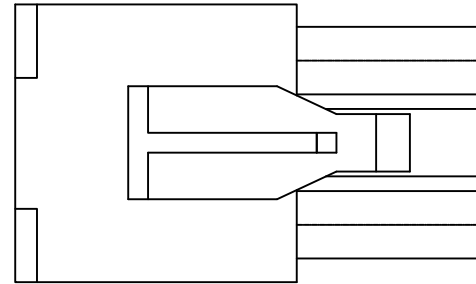
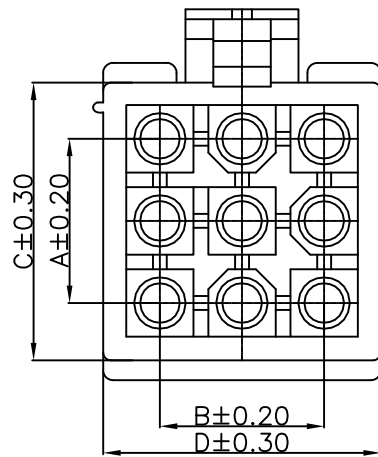
Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White




Ordering Information

SCT4140FH - *** **B** WT 102

No.of Pins See Table Insulation B=PA66 Color WT=White



3x5	8.28	16.56	14.00	22.40
3x4	8.28	12.42	14.00	18.20
3x3	8.28	8.28	14.00	14.00
2x3	4.14	8.28	9.80	14.00
2x2	4.14	4.14	9.80	9.80
3x1	8.28	—	14.00	5.60
2x1	4.14	—	9.80	5.60
1x1	—	—	5.60	5.60
Poles	A	B	C	D
	Dimensions			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	—	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.10	Changed from SCT4140MH-xxP to SCT4140MH-xxxBWT102	—	—	X.X	±0.35	—	—	UNIT	mm	
AO	2006.05.02	NEW	—	—	X.XX	±0.25	—	—	SIZE	A4	
					X.XXX	±0.15	—	—	SHEET	1/1	
					Angle	± 3'	—	—	PART NO.	SCT4140MH-xxxBWT102	
					DIM	TOL	APPROVE	Allen	2021.07.10	PROJ.	 TITLE: FL4.14 Male Housing Connector