



**SPECIFICATIONS**

Current Rating:1.0 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:300V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:Nylon6T,UL94V-0  
 Soldering Temperature:+260°C,5S~8S max

Dimension						
H	W	PA	PB	PC	PD	PW
1.00	2.10	3.00	/	/	0.90	5.50
1.50	2.40	3.00	/	/	0.90	5.50
1.70	2.40	3.00	/	/	0.90	5.50
2.00	2.40	3.00	/	/	0.90	5.50
2.54	2.40	3.00	/	/	0.90	5.50

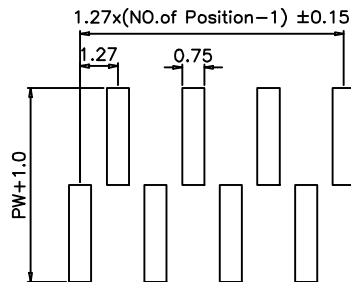

P.C.B LAYOUT A Type



P.C.B LAYOUT B Type

PH127Hxx-SMT-XXxP

Insulator height  
 1.0mm: 100  
 1.50mm: 150  
 1.70mm: 170  
 2.00mm: 200  
 2.54mm: 254

No. of Circuits  
 1: Single row  
 2: Dual row  
 ST: Straight 180°  
 RT: Right-angle 90°  
 SMT: Surface-Mount

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		<b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4	PART NO.	PH127Hxx-SMT-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1	TITLE	1.27mm Pin Header Single Row Straight SMT Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'				PROJ.	◆ ←		