

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G


H

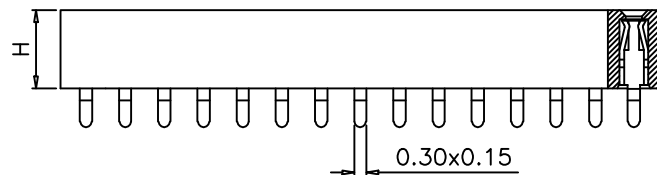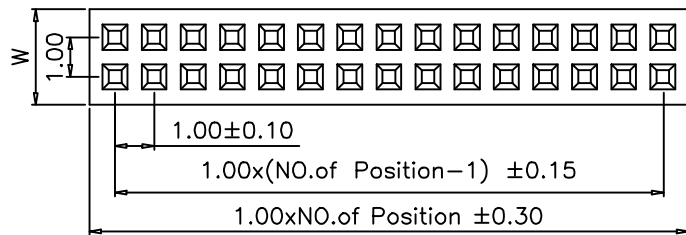

SPECIFICATIONS

Current Rating:0.75 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:300V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:Nylon6T,UL94V-0
 Soldering Temperature:+260°C,5S~8S max

Dimension						
H	W	PA	PB	PC	PD	PW
2.00	2.50	/	/	1.00	/	/

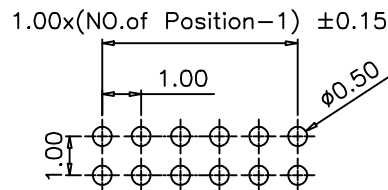

P.C.B LAYOUT

FH100Hxx-ST-XxxP

Insulator height 2.0mm: 200

ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount

No. of Circuits
 1: Single row
 2: Dual row

OPERATION	DRAW	SIMON	2010.03.06	SCALE	
~ 10 ±0.15	DESIGN			UNIT	mm
20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4
30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1
Angle ± 2'				PROJ.	◆ ←
DIM TOL					

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

PART NO. FH100Hxx-ST-2xXXP
 TITLE 1.0mm Female Header Double Row Straight Dip Type

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

1 2 3 4 5 6 7 8 9 10