



SPECIFICATIONS

Current Rating:0.75 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:300V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:Nylon6T,UL94V-0
 Soldering Temperature:+260°C,5S~8S max

Dimension							
H	W	PA	PB1	PB2	PC	PD	PW
1.00	2.30	1.80	2.00	2.70	/	0.8	4.2
1.50	3.20	1.80	2.50	3.20	/	0.8	4.2

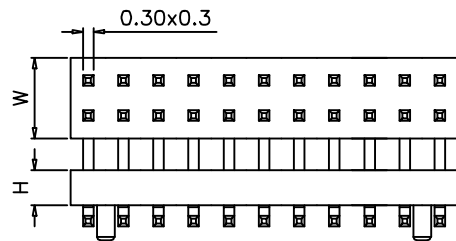

PH100DHxx-AR-SF-XxxP

Insulator height
 1.0mm:100
 1.5mm:150

ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount
 SF: SMT with pegs

No. of Circuits
 1: Single row
 2: Dual row

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4	PART NO.	PH100DHxxWxx-AR-SF-2xXXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1	TITLE	1.0mm Pin Header Dual Row Straight SMT Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2' TOL			PROJ.	◆ ←		