



1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

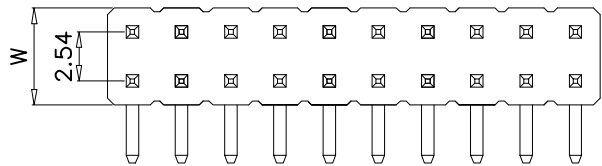



$2.54 \times (\text{NO. of Position} - 1) \pm 0.20$



P.C.B LAYOUT

**SPECIFICATIONS**

Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 500V AC/minute  
 Temperature Range:  $-40 \sim +105^\circ$   
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: PBT  
 Soldering Temperature:  $+220^\circ\text{C}$ , 10S max

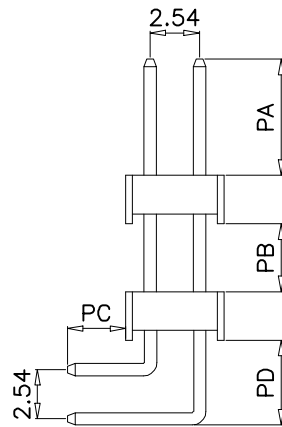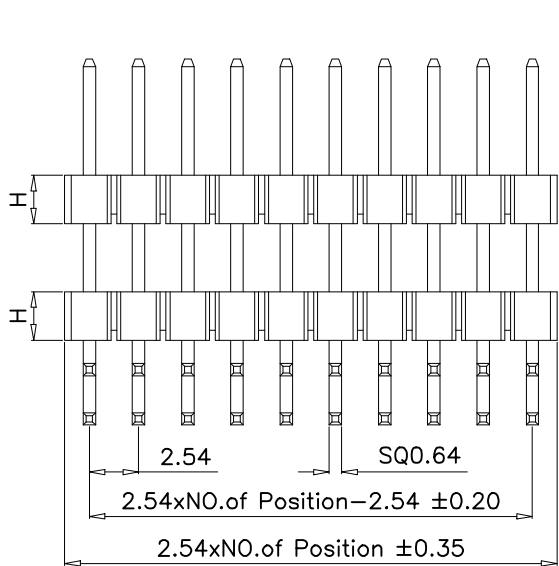

Dimension						
H	W	PA	PB	PC	PD	PW
1.50	5.00	6.00	5.50	3.00	4.38	/
1.70	5.00	6.00	5.00	3.00	4.38	/
2.00	5.00	6.00	4.50	3.00	4.38	/
2.50	5.00	6.00	3.50	3.00	4.38	/

PH254DHxx-RT-XXXP

Insulator height  
 1.5mm: 150  
 1.70mm: 170  
 2.00mm: 200  
 2.50mm: 250

No. of Circuits  
 1: Single row  
 2: Dual row

ST: Straight 180°  
 RT: Right-angle 90°  
 SMT: Surface-Mount

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		<b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4	PART NO.	PH254DHxx-RT-2xXXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1	TITLE	2.54mm Pin Header Dual Row Right Angle Dip Type
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE			PROJ.	◆ ←		

1 2 3 4 5 6 7 8 9 10