
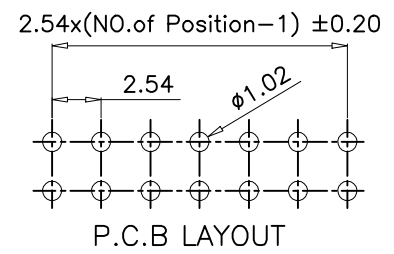


1 2 3 4 5 6 7 8 9 10



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

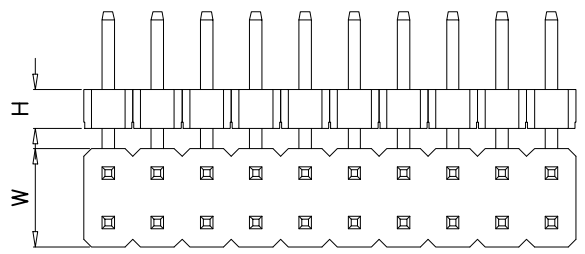

SPECIFICATIONS
 Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 500V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PBT
 Soldering Temperature: +220°C, 10S max

Dimension						
H	W	PA	PB	PC	PD	PW
1.50	2.54	6.00	7.57	3.00	9.70	/
1.70	2.54	6.00	7.37	3.00	9.50	/
2.00	2.54	6.00	7.07	3.00	9.20	/
2.50	2.54	6.00	6.57	3.00	8.70	/

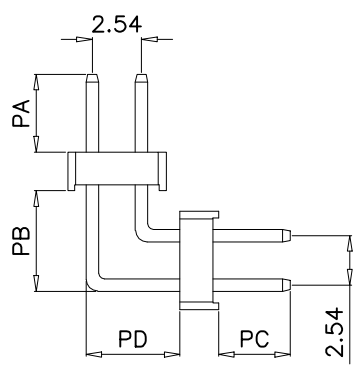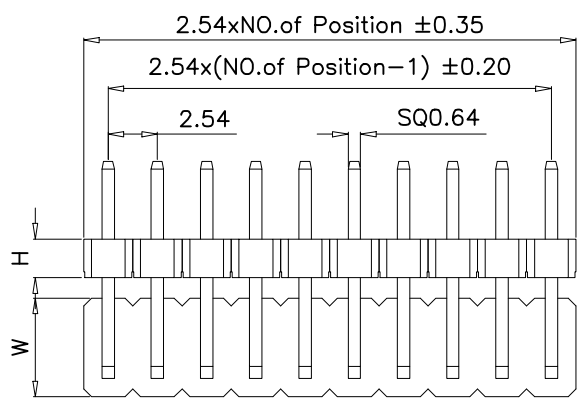

PH254RDHxx-RT-XXxP

Insulator height
 1.5mm: 150
 1.70mm: 170
 2.00mm: 200
 2.50mm: 250

No. of Circuits
 1: Single row
 2: Dual row

ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4	PART NO.	PH254RDHxx-RT-2xXXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1	TITLE	2.54mm Pin Header Dual Row Right Angle Dip Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	ANGLE			PROJ.	◆ ←		

1 2 3 4 5 6 7 8 9 10